

GET IN TOUCH WITH ARTEOR™

A WORLD OF NEW POSSIBILITIES

2019 EDITION









WORLD IN PROGRESS

ARTEOR™ IS PART OF IT

Digitalisation and networks are changing everything: how we live, communicate, work and shape our environment. Homes, offices, hotels and public buildings are becoming smarter all the time and ever more amenable to what their occupants want.

Arteor exploits these new opportunities and is also easy to install, configure and use. With its new functions, innovative operating concepts and updated design, Arteor provides universal solutions to the problems encountered by dealers, retailers, installers, systems integrators and planning specialists all over the world – as well as the expectations of their clients.

CONTENTS

2 GENERAL FEATURES		WORLD IN PROGRESS	02
4-8 NEW FINISHES		NEW NEUTRAL FINISHES A WIDER CHOICE OF METALS ARTEOR™ ON TREND	04 06 08
9-15 NEW ARTEOR™ FUNCTIONS		USB CHARGERS FOR THE HOME WIRELESS CHARGERS LIGHTING SOLUTIONS	10 12 14
24-27 ARTEOR™ WITH NETATMO		THE SMART, RADIO BASED SOLUTION FOR THE CONNECTED HOME. SIMPLE - OPEN - ADAPTABLE	16
24-27 UX FOR UPSCALE HOTELS		A NEW SET OF DEDICATED ROOM CONTROLLERS FOR PREMIUM LEVEL ESTABLISHMENTS	24
28-61 CATALOGUE PAGES			28


T I M E L E S S H A R M O N Y

N E W N E U T R A L F I N I S H E S





MAGNESIUM

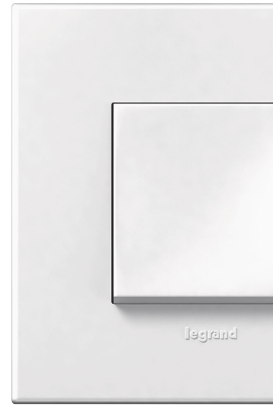

SOFT ALU



WHITE

NEUTRAL FULL COLOUR

This neutral and minimalist collection leaves plenty of room for contemporary design concepts. An extended colour range with new plate and mechanism colours gives designers even greater freedom.



CHAMPAGNE

NEW COMBINATIONS

Arteor meets customisation requirements by offering more ways to combine colours. But the more technology shapes our lives, the more we want it to blend in discreetly with our individual environments. This is why clean lines and a pared-down look define the design philosophy of the range.



DARK BRONZE



GRAPHITE

S T R O N G I M P A C T

A WIDER CHOICE OF METALS



REFLECTIVE METAL

A new collection made of metal finishes provides a suitably brilliant solution for more demanding projects. Elegantly discreet despite their mirror finish, these switches blend seamlessly into their environment. Available in gold and other colours, they give a definite nod to the technology involved.



STAINLESS STEEL



GOLD



BRUSHED METAL

Two further colours have been added to this relatively neutral but prestigious collection of brushed metal finishes. "Pink Champagne" (a warm, reddish brown) and "Black" offer designers a wider choice for high-end applications.



STAINLESS STEEL

GOLD BRASS

BLACK

PINK CHAMPAGNE

OUT OF THE BOX

ARTEOR™ ON TREND




CUBE

In the Wood collection, nature and technology combine to create an original, appealing finish. The unique texture of Signature Cube turns this extraordinary finish into a sophisticated modern design element and creates a unique combination of look and feel.




GREY OAK

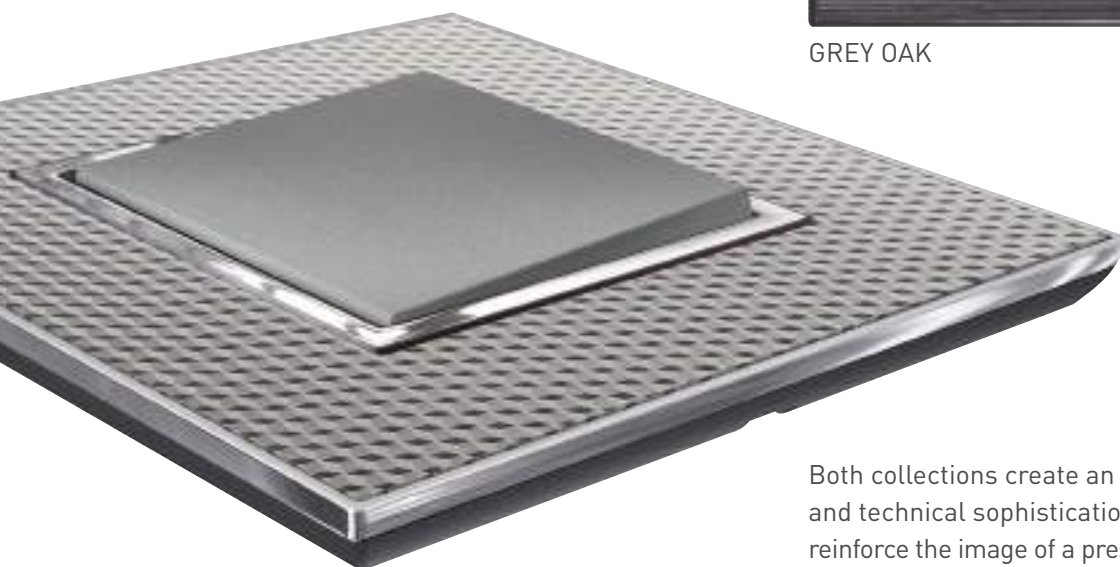

Both collections create an impression of discretion and technical sophistication. Chromed metal accents reinforce the image of a prestigious product. A bevelled profile ensures an on-trend slimline look.

KEEP IN TOUCH

NEW ARTEOR™ FUNCTIONS

A woman with long dark hair, wearing a white button-down shirt, is smiling warmly as she holds a young child with light brown hair and blue eyes. The child is looking intently at a black smartphone held in the woman's hand. The background is a soft, out-of-focus indoor setting.

You have to be connected to get on. This is why options to charge mobile devices, wherever you may be, are so essential these days. Arteor offers chargers in various versions for this very reason, whether you're out and about, at home, in a hotel, or at the office. USB chargers or wireless chargers – they both allow to keep your mobile devices charged and running, anywhere and any time.

ALWAYS FULL POWER

USB CHARGERS FOR THE HOME

Conveniently placed USB chargers at home allow you to charge your mobile devices easily wherever it's handy: near the entrance, by the bedside or in the kitchen... Arteor has a suitable solution for every kind of mobile device – including, of course for the new generation with USB C-Type connection.




THE NEW 16A MULTI STANDARD SOCKET OUTLET WITH USB CHARGER


The 16 A multi standard socket is equipped with a 2.4 A – 5 V – 12 W USB A-Type charging port. The socket outlet complies with IEC 60950-1 and is **shuttered for child safety**.



16 A MULTI STANDARD SOCKET OUTLET WITH
USB A-TYPE CHARGER



The USB charger complies with IEC 60950-1. The 2.4 A output is sufficient to **charge any tablet at full speed**.

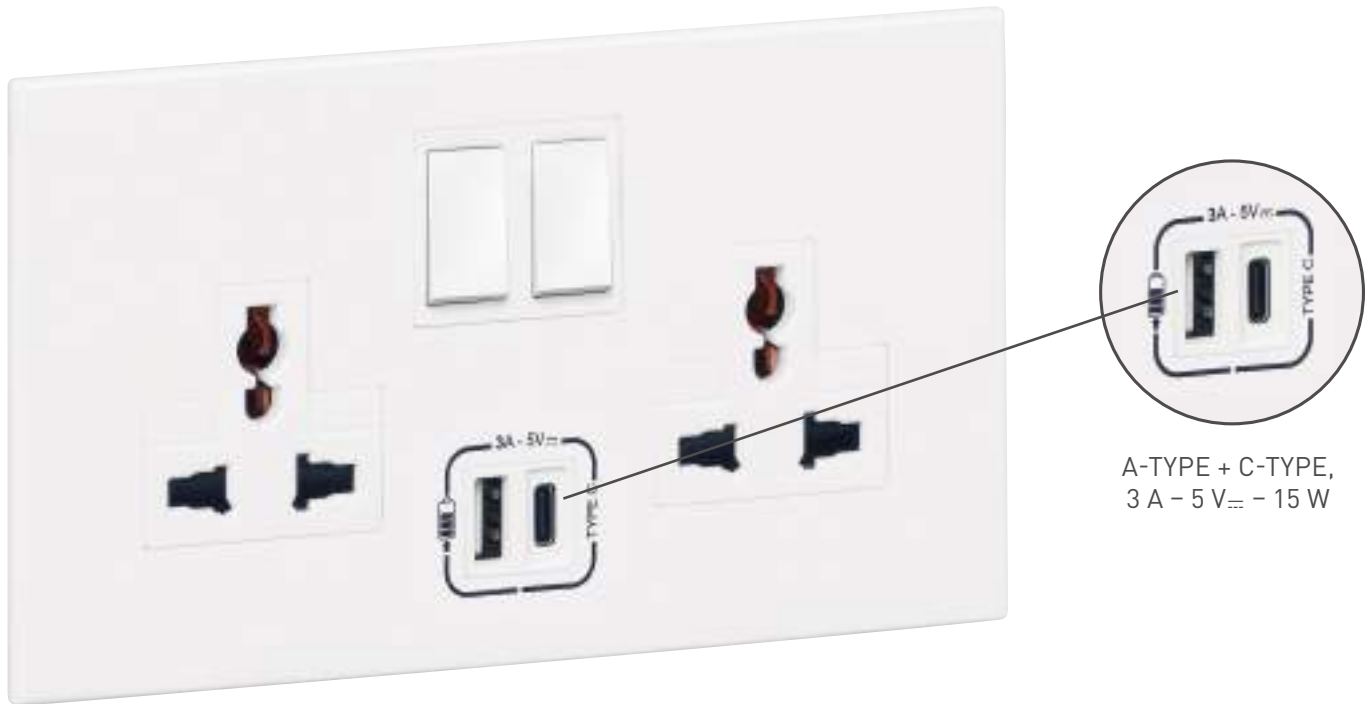

A-TYPE + C-TYPE,
3 A - 5 V_~ - 15 W

USB A-TYPE AND C-TYPE CONNECTIVITY

More and more mobile devices are equipped with the new C-Type USB. With Arteor, you are ready for this development today: the new Arteor 2-gang 16 A Multi standard socket outlets are equipped with two different USB charging ports, A-Type and C-Type 3 A - 5 V_~ - 15 W.

USB CHARGER

These modular charging sockets with a C-Type USB charging port comply with IEC 62684-2011-1. Aesthetically pleasant, they can be used to charge any mobile device, both at work and at home.



MODULAR USB A-TYPE + C-TYPE
CHARGER 5V_~ - 3 A - 15W



MODULAR DOUBLE C-TYPE USB
CHARGER 5V_~ - 3A - 15 W

WHEREVER YOU ARE

WIRELESS CHARGERS

Use at work and on the move requires a different set of features, with adaptability and robustness top of the list. With their pleasing aesthetics, Arteor chargers are even more universally suitable.



WIRELESS CHARGER + A-TYPE USB

This Arteor wireless charger features an additional A-Type USB port for simultaneous charging of two devices – a smartphone with a Qi receiver via induction and a tablet via the USB port. To be mounted on the wall, installed in a cable column, or as part of a multi-outlet extension in the office or at home (e.g. in the kitchen).



QI WIRELESS CHARGER FOR INTEGRATION INTO FURNITURE

The Qi wireless charger comes with an extra-slim design for integration into furniture, e.g. in meeting rooms, offices or public spaces. Also suitable for kitchen worktops at home. Supplied with external 110 – 240 V universal power supply. Plugs comply with European, BS, US and Australian/Chinese standards.



FLUSH-MOUNTED WIRELESS CHARGER FOR PUBLIC AREAS

IK 08 – IP 66, impact-resistant and weatherproof design, specifically created for public areas such as restaurants, waiting rooms, libraries, passageways or transit areas, and even swimming pools.



Wireless Power Consortium: 750 members, ensuring interoperability with induction-compatible phones.

Qi: global standard adopted by vehicle manufacturers/cafés/restaurants/hotels

Legrand is member of the Wireless Power Consortium. Legrand wireless chargers are conform to the Qi WPC standard.

THE RIGHT M O O D

ARTEOR™ LIGHTING SOLUTIONS

Light creates atmosphere, emphasizes room features and helps overcome emergencies. Arteor solutions provide bright prospects for developers and decorators who want to make a very deliberate use of lighting in their projects.



UNIVERSAL PUSH-BUTTON DIMMER FOR ALL TYPES OF LAMPS

With the Universal dimmer for all modern loads including dimmable CFLs and LEDs Arteor makes it easy to create individual lighting moods.

Convenient to use:

33% and 66% luminance are preset, and there is a level memory function too. The night light function with its slow dimming feature is a practical solution for bedrooms or children's rooms.

Easy installation:

Two cables are enough as a neutral wire is not required
– ideal for renovations or installation work carried out at a later time.



ARTEOR™ WITH NETATMO

ADD A TOUCH OF SMARTNESS



ARTEOR™ with NETATMO

THE SMART RADIO SOLUTION

Arteor with Netatmo is a radio based solution for the connected home. The intelligent products communicate with one another via radio ZigBee (2.4 GHz waveband). This means there is no need for specific or extensive cabling. Also, although the range only contains a few products, these can be used to create lots of individual solutions for a more customised feel at home.

SIMPLE, ADAPTABLE, OPEN

Arteor with Netatmo has been designed and developed as a simple solution to make every house more individual, convenient and secure. Simple for planners, who are able to integrate many useful functions without having to provide for complicated cabling. Simple for installers, who are able to install the system without a great deal of effort or specialist knowledge. Simple for users, who will find it convenient to operate, easy to extend and are able to make changes at any time.



APP CONTROL FOR EASE OF USE

All functions in an Arteor with Netatmo installation can also comfortably be controlled on your smartphone or tablet: switching individual lights on or off, controlling roller blinds, curtains and electrical appliances or triggering more complex scenarios - using the app, you have everything under control. And you stay connected with your home, no matter where you are.

VOICE CONTROL

Using voice commands, the installation can be managed without lifting a finger.



GROWING WITH USERS' NEEDS

ADAPTIVE TO SUIT OUR EVER-CHANGING LIFESTYLE

Its simple installation makes Arteor with Netatmo a really smart choice. No complex BUS system or cabling is needed to adapt the solution smoothly to changing circumstances. Putting a switch within reach of children, rearranging the living room, converting a kid's bedroom into an office, adding more functions... - Arteor with Netatmo will change as readily and as quickly as you do!



PUT THEM ANYWHERE

Using wireless switches you can ensure your controls are always exactly where you want them, for example lower on the wall to be within easy reach of the children. They can be repositioned as your children grow or when you decide to rearrange your furniture.



ALERTS

If there's a power failure when you're not at home, the app will warn you instantly so you can take action.



ENERGY MANAGEMENT

Whether to check your real-time energy consumption or to do a more long-term, in-depth analysis, the app will help you all the way towards greater energy efficiency.



“LEAVING HOME” SCENARIO

A single press will turn off the lights and close all the shutters as you leave the home, meaning you save time and gain convenience.



“WAKE UP” SCENARIO

Have soft light come on and the shutters open for a great start to the day, every day!



FEW COMPONENTS – LOTS OF OPTIONS

The system consists of only a few simple components. The 'Gateway Kit' that needs to be installed to start, connected controls which trigger actions, such as controlling lights, roller blinds and electrical appliances and wireless, battery powered controls. They manage scenarios, create centralised functions and allow remote control of individual functions.


CONNECTED WIRED PRODUCTS

The wired products are installed in the same way as conventional components and then paired with the wireless switches (which can be positioned anywhere) via the ZigBee 2.4 Ghz waveband. Thanks to the dynamic mesh network, all functions can easily be reconfigured at any time. It is also easy to add extra modules.

WIRELESS CONTROLS

Wireless light and roller blind switches are used to extend the installation and enable individual, group-based or centralized remote control of lighting and roller blinds. They are adaptable to take into account evolutions of the installation over time.

Wireless scenario controls are used to activate pre-programmed, more complex scenarios that enhance comfort when you wake up in the morning or go to bed at night, leave the house or come home.

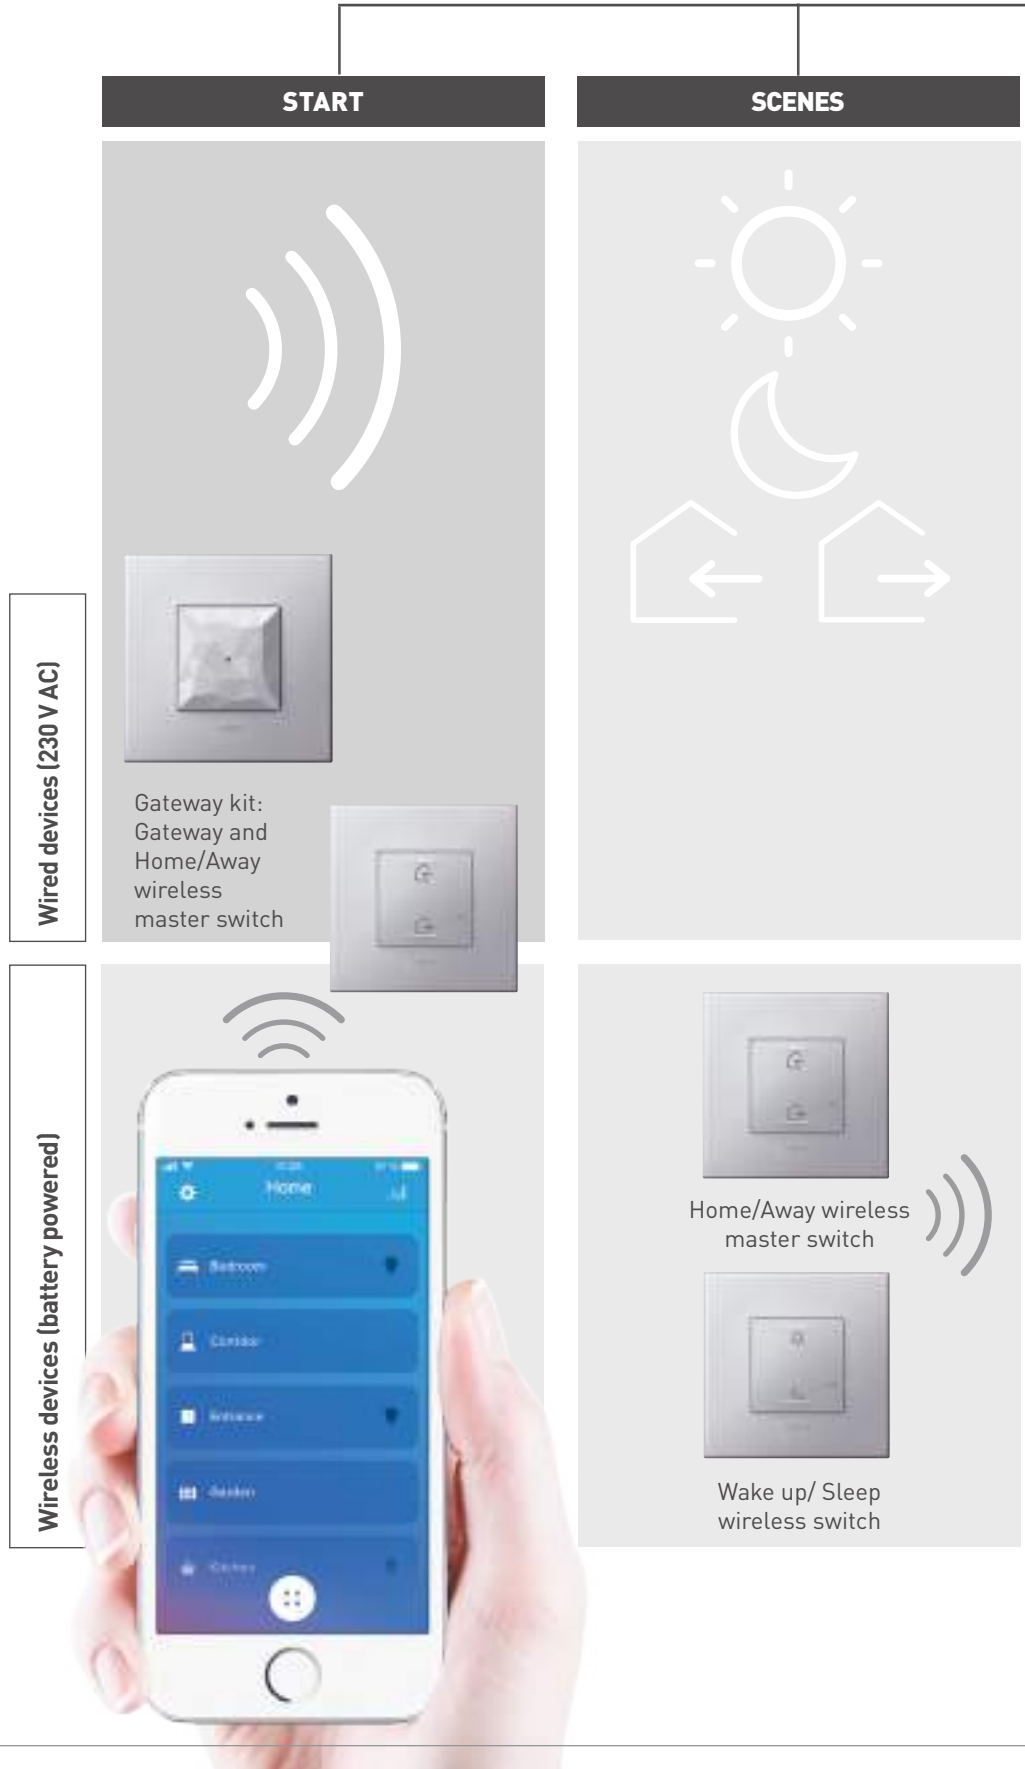


FUNCTIONS

LIGHT



Connected light switch with dimmer option, 2 modules
 Connected light switches, 2x1 module,
 Micromodule switch

CURTAINS/ ROLLER BLINDS



Connected curtain / roller blind switches
 2 x1 module

ENERGY



Connected mobile socket outlet,
 Energy module for rail mounting
 Connected socket outlet module



Wireless 1-gang and 2-gang light switches



Curtain/roller blind wireless switch

The Home + Control App, which can be used to control the system via smartphone and tablet, is available for devices with Android and iOS. Download it for free from your usual app stores.



HOME + CONTROL App

INNOVATIVE OPERATING CONCEPTS

TALK - SWIPE - TOUCH

VOICE CONTROL

As modern home technology becomes increasingly complex, it also gets to be easier to operate. Thus, for instance, Arteor with Netatmo makes it possible to control functions via voice commands. Used in combination with the Google Assistant, Amazon Alexa or Apple Siri, the system obeys the spoken word. Lighting in the home, for example, can be switched on or off with a simple word.



THE HOME + CONTROL APP FOR SMARTPHONE OR TABLET

The app on the smartphone or tablet opens up new options: monitoring of instantaneous power consumption, remote surveillance of the connected home, and control over various functions when the user is out and about.



AND OBVIOUSLY LOCAL CONTROL

Of course, all functions can still be used in the traditional way via switches on the wall. If furniture needs to be rearranged or small children need to be able to reach a switch, the wireless switches can be repositioned easily at any time.



HOME + CONTROL App


iPhone, iPod and iPad are registered trademarks of Apple Inc. registered in the US and other countries. HomeKit is a trademark of Apple Inc. App Store is a service mark of Apple Inc. Google, Android, Google Play, and the Google Play logo are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.



FIVE STAR SOLUTIONS

UX FOR UPSCALE HOTELS

Designed specifically for premium level establishments, UX for Upscale Hotels provides top quality solutions with its brand-new touchplates and enhanced functionalities. Operating on an open protocol, the guest room management system can seamlessly integrate with third party building management systems, thus raising hospitality to new heights across the world, in conjunction with Arteor or other Legrand wiring device ranges.

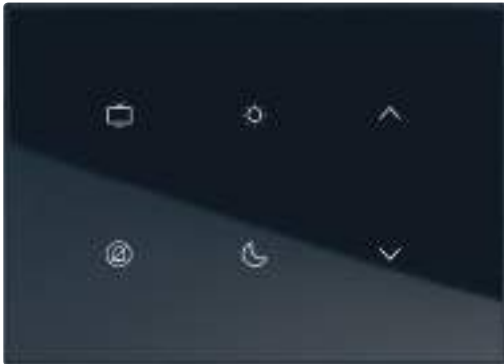


6-GANG TOUCH PLATE

It can be configured on an individual basis as a convenient way of activating various scenarios such as “television”, “work” and many more.



BEDSIDE PANEL

For a convenient way of triggering complex scenarios for a wide range of situations. Temperature control for the hotel room is also integrated, as is a “Do not disturb” function.

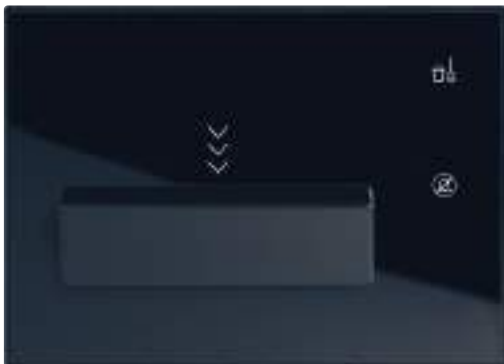


KEY CARD READER

The power in the room can be switched on with the hotel card. The “Make up room” and “Do not disturb” signs can also be activated from here.

EXTERNAL READER

For opening the door with the hotel card and to provide a bell function for visitors. It lets staff know the guest doesn't want to be disturbed or that the room can be cleaned. Room number can be added.

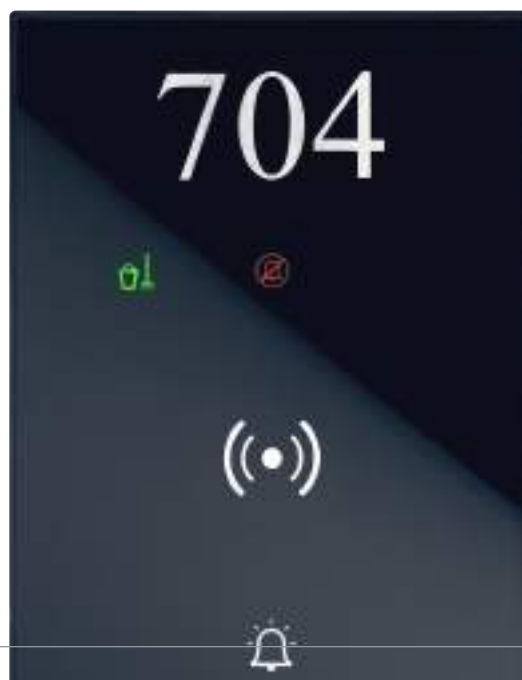

FIRST-CLASS SERVICE

THE PERSONAL TOUCH

With global hotel projects, it is absolutely critical to implement the individual corporate design. This is why Arteor is open to clients' design preferences. The range is flexible when it comes to functionality too, so Legrand works closely with architects and planning specialists to come up with the perfect bespoke solution.

A special configuration tool has been developed for quick and easy implementation of customer requirements.



The configuration tool provides a convenient way of selecting the colour options for touch plates and frames, the icons and other forms of customisation.

Check out the configuration tool:
<https://www.uxforupscalehotel.legrand.com>



Products are made to measure which means that design and technology can be perfectly adapted to the corporate style and the users' preferences. Choose from four different colour options for the touch plates (White, Black, Light Grey and Dark Grey) and even more options for the colour of the frames. Customize your guests' experience by adding the hotel logo or the room number. Welcome guests with preset moods. Give your guests the five star treatment they deserve.




Touch plates available in four colours: Black, White, Light Grey and Dark Grey.



Choose between standard surface installation or fully recessed mounting, in-wall or integrated into furniture.

CATALOGUE

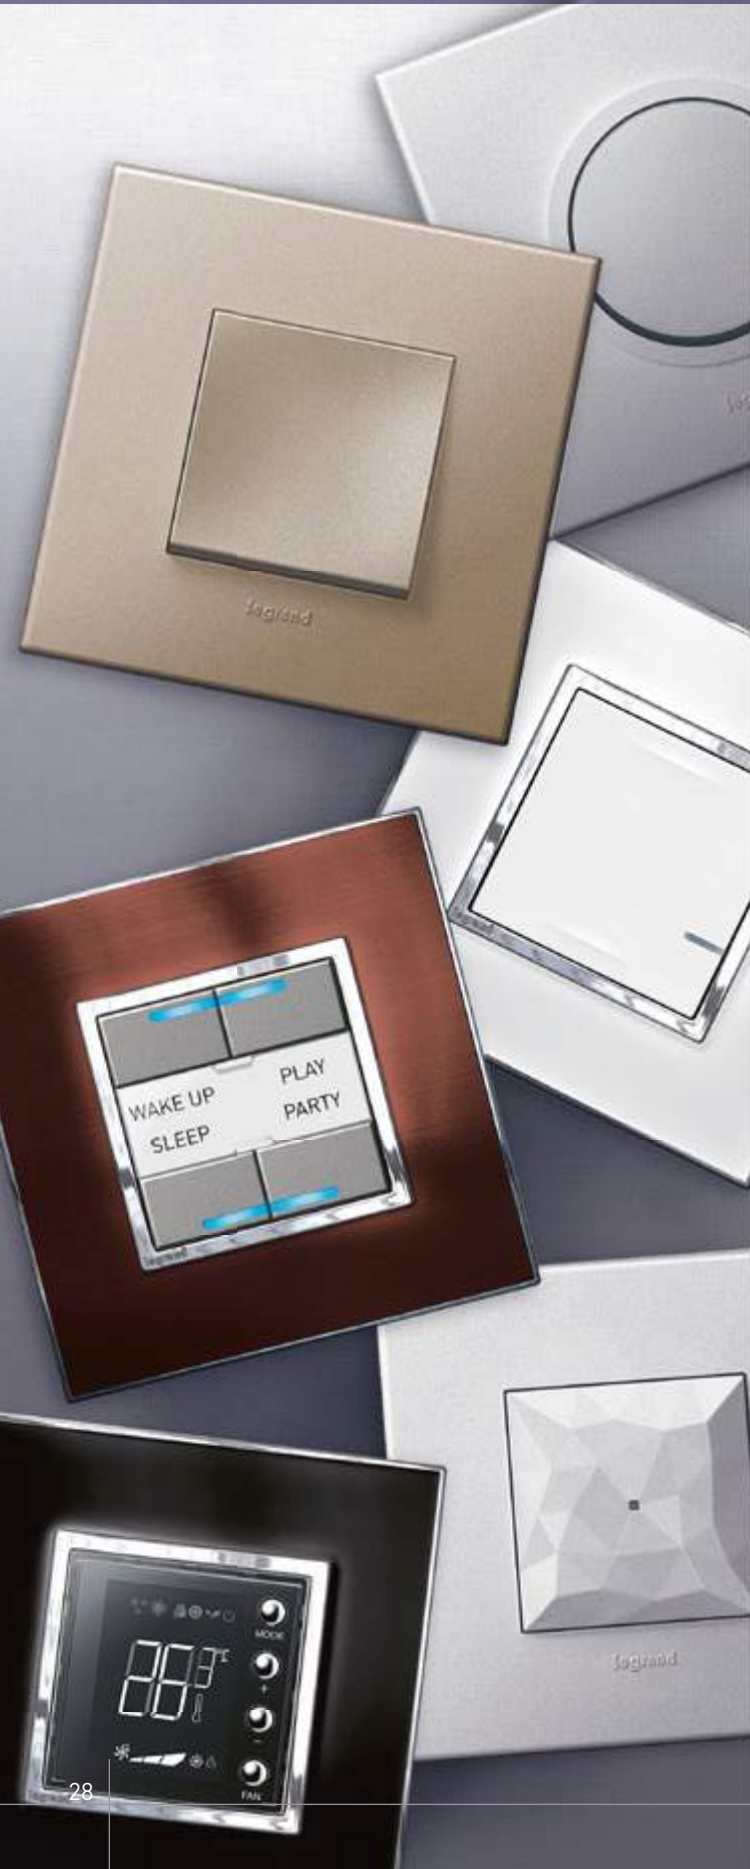

P. 30
Mechanical switches



P. 36
Ventilation, heating and roller blinds control, RCBOs and MCBs


Arteor™ Wiring Devices



P. 39
Socket outlets with USB charger



P. 43
Rear pluggable data sockets, wiring splitters



P. 46
International support frames

Hotel solutions



P. 59
BUS solutions



P. 32
Push-buttons



P. 33
motion sensors



P. 34
Dimmers



P. 37
USB chargers and wireless power chargers



P. 39
Lighting control emergency push-buttons



P. 40
International socket outlets



P. 41
Telephone and television sockets



P. 42
RJ 45 sockets



P. 43
USB data sockets



P. 44
Audio and video sockets



P. 46
Ancillary mechanisms and blanking cover plates



P. 48
Plates selection charts



P. 56
UX for Upscale Hotels touch interfaces (BUS)



P. 58
KNX solutions



P. 59
Stand-alone hotel solutions

Arteor™ mechanical switches

square version



Support frame and plate selection charts **p. 48 - 51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p.46) and plates (p.48 - 51)

Pack	Cat.Nos	Switches 10 AX - 250 V~	Pack	Cat.Nos	Switches 20 AX - 250 V~
10	5 720 04	1-way switch ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module ● Red - 1 module	10	5 720 09	1-way switch ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
10	5 725 04		10	5 725 09	
10	5 700 04		10	5 700 09	
10	5 710 04		10	5 710 09	
10	5 724 50		10	5 720 41	
10	5 720 34	10	5 725 41		
10	5 725 34	10	5 723 81		
10	5 700 34	10	5 723 80		
10	5 710 34	10	5 720 10	2-way switch ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module	
10	5 720 05	10	5 725 10		
10	5 725 05	10	5 700 10		
10	5 700 05	10	5 710 10		
10	5 710 05	10	5 720 11		2-way switch with indicator To be equipped with LED (p. 33) ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
10	5 720 35	5	5 725 11		
10	5 725 35	5	5 723 83		
10	5 700 35	5	5 723 82		
10	5 710 35	5	5 720 42	○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules	
10	5 720 06	5	5 725 42		
10	5 725 06	5	5 723 85		
10	5 721 75	5	5 723 84		
10	5 721 74	5			
5	5 720 36	2-way switch with indicator and label-holder To be equipped with LED (p. 33) ○ White - 2 modules ● Magnesium - 2 modules	5	5 720 08	Intermediate switch ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
5	5 725 36		5	5 725 08	
5	5 721 77		5	5 700 08	
5	5 721 76		5	5 710 08	
5			5	5 720 38	
5	5 720 37	10	5 725 38		
5	5 725 37	10	5 721 66		
5		10	5 721 65		
5		10			

Support frames and plates, **p. 46 and 48 to 51**



Arteor™ mechanical switches

round version



Support frame and plate selection charts **p. 48 - 51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 - 51)

Pack	Cat.Nos	Switches 10 AX - 250 V~
10	5 730 10	1-way switch
10	5 731 10	○ White - 1 left module
10	5 700 62	● Magnesium - 1 left module
10	5 710 62	● Champagne - 1 left module
10		● Soft Alu - 1 left module
10	5 730 11	○ White - 1 middle module
10	5 731 11	● Magnesium - 1 middle module
10	5 730 12	○ White - 1 right module
10	5 731 12	● Magnesium - 1 right module
10	5 700 63	● Champagne - 1 right module
10	5 710 63	● Soft Alu - 1 right module
10	5 730 60	○ White - 2 modules
10	5 731 60	● Magnesium - 2 modules
10	5 700 66	● Champagne - 2 modules
10	5 710 66	● Soft Alu - 2 modules
10	5 730 13	2-way switch
10	5 731 13	○ White - 1 left module
10	5 700 64	● Magnesium - 1 left module
10	5 710 64	● Champagne - 1 left module
10		● Soft Alu - 1 left module
10	5 730 14	○ White - 1 middle module
10	5 731 14	● Magnesium - 1 middle module
10	5 730 15	○ White - 1 right module
10	5 731 15	● Magnesium - 1 right module
10	5 700 65	● Champagne - 1 right module
10	5 710 65	● Soft Alu - 1 right module
10	5 730 61	○ White - 2 modules
10	5 731 61	● Magnesium - 2 modules
10	5 700 67	● Champagne - 2 modules
10	5 710 67	● Soft Alu - 2 modules
		2-way switch with indicator
		To be equipped with LED (p.33)
5	5 730 16	○ White - 1 left module
5	5 731 16	● Magnesium - 1 left module
5	5 731 34	● Soft Alu - 1 left module
5	5 730 17	○ White - 1 middle module
5	5 731 17	● Magnesium - 1 middle module
5	5 731 35	● Soft Alu - 1 middle module
5	5 730 18	○ White - 1 right module
5	5 731 18	● Magnesium - 1 right module
5	5 731 36	● Soft Alu - 1 right module
5	5 730 62	○ White - 2 modules
5	5 731 62	● Magnesium - 2 modules
5	5 731 37	● Soft Alu - 2 modules
		Intermediate switch
10	5 730 63	○ White - 2 modules
5	5 731 63	● Magnesium - 2 modules
5	5 730 67	● Soft Alu - 2 modules

Arteor™ mechanical switches

round version (continued)



5 731 26

5 731 28

Support frame and plate selection charts **p. 48 - 51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 - 51)

Pack	Cat.Nos	Switches 20 AX - 250 V~
10	5 730 20	1-way switch ○ White - 1 left module ● Magnesium - 1 left module ● Soft Alu - 1 left module
10	5 731 20	
10	5 731 39	
10	5 730 21	○ White - 1 middle module ● Magnesium - 1 middle module ● Soft Alu - 1 middle module
10	5 731 21	
10	5 731 40	
10	5 730 22	○ White - 1 right module ● Magnesium - 1 right module ● Soft Alu - 1 right module
10	5 731 22	
10	5 731 41	
10	5 730 70	○ White - 2 modules ● Magnesium - 2 modules ● Soft Alu - 2 modules
10	5 731 70	
10	5 731 42	
10	5 730 23	2-way switch ○ White - 1 left module ● Magnesium - 1 left module ● Soft Alu - 1 left module
10	5 731 23	
10	5 731 43	
10	5 730 24	○ White - 1 middle module ● Magnesium - 1 middle module ● Soft Alu - 1 middle module
10	5 731 24	
10	5 731 44	
10	5 730 25	○ White - 1 right module ● Magnesium - 1 right module ● Soft Alu - 1 right module
10	5 731 25	
10	5 731 45	
5	5 730 26	2-way switch with indicator To be equipped with LED (p. 33) ○ White - 1 left module ● Magnesium - 1 left module
5	5 731 26	
5	5 730 28	○ White - 1 right module ● Magnesium - 1 right module
5	5 731 28	
5	5 730 71	○ White - 2 modules ● Magnesium - 2 modules
5	5 731 71	

Arteor™ push-buttons

square version



5 700 00

5 710 00

5 720 15

5 725 16


Support frame and plate selection charts **p. 48 - 51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	5 720 00	1-way push-button ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
10	5 725 00	
10	5 700 00	
10	5 710 00	
10	5 720 30	○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
10	5 725 30	
10	5 730 35	
10	5 730 34	1-way push-button with bell symbol ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
5	5 720 15	
5	5 725 15	
5	5 730 37	
5	5 730 36	○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
5	5 720 56	
5	5 725 56	
5	5 730 39	
5	5 730 38	1-way push-button with locator and bell symbol Equipped with blue LED ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
5	5 720 16	
5	5 725 16	
5	5 730 41	
5	5 730 40	2-way push-button ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
10	5 720 01	
5	5 725 01	
5	5 730 43	
5	5 730 42	○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
10	5 720 31	
5	5 725 31	
5	5 730 45	
5	5 730 44	2-way push-button with locator Equipped with blue LED ○ White - 1 module ● Magnesium - 1 module ● Champagne - 1 module ● Soft Alu - 1 module
10	5 720 02	
10	5 725 02	
10	5 730 47	
10	5 730 46	○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
10	5 720 32	
5	5 725 32	
5	5 730 49	
5	5 730 48	

Arteor™ push-buttons

round version

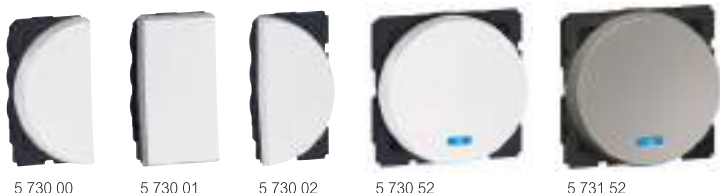

Support frame and plate selection charts **p. 48 - 51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	5 730 00	1-way push-button ○ White - 1 left module ● Magnesium - 1 left module ● Soft Alu - 1 left module
10	5 731 00	
10	5 730 54	
10	5 730 01	○ White - 1 middle module ● Magnesium - 1 middle module ● Soft Alu - 1 middle module
10	5 731 01	
10	5 730 55	
10	5 730 02	○ White - 1 right module ● Magnesium - 1 right module ● Soft Alu - 1 right module
10	5 731 02	
10	5 730 56	
10	5 730 50	○ White - 2 modules ● Magnesium - 2 modules ● Soft Alu - 2 modules
10	5 731 50	
10	5 730 57	
5	5 730 80	1-way push-button with bell symbol ○ White - 2 modules ● Magnesium - 2 modules ● Soft Alu - 2 modules
5	5 731 80	
5	5 730 58	
5	5 730 51	2-way push-button ○ White - 2 modules ● Magnesium - 2 modules ● Soft Alu - 2 modules
5	5 731 51	
5	5 730 59	
5	5 730 52	2-way push-button with locator Equipped with blue LED ○ White - 2 modules ● Magnesium - 2 modules
5	5 731 52	
10	5 730 53	2-way push-button with label-holder ○ White - 2 modules ● Magnesium - 2 modules
5	5 731 53	

Pack	Cat.Nos	Lamps
10	5 724 56	For locator switch LED 230 V - blue
10	5 724 55	For indicator switch LED 230 V - red
10	5 724 57	LED 24 V - red
10	5 724 54	LED 12 V - red

Arteor™ electronic switches and motion sensors



5 740 47

Support frame and plate selection charts **p. 48 - 51**
 Load selection charts **p. 35**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Motion sensors
1		Measurement of luminosity threshold Adjustment of luminosity threshold and time delay Max. lux and min. time delay factory pre-set Recommended fixing height: 1 m IR detection 180° Adjustable luminosity threshold: 5 to 1275 lux Installation in box min. depth 40 mm recommended 2 modules Range 8 m With neutral, 3-wire - 2000 W Operates: - 2000 W incandescent and halogen lamps 230 V~ - 1000 VA ELV halogen lamps with ferromagnetic or electronic transformer - 500 VA compact fluorescent lamps - 0 to 250 W for LEDs Settings modified on the device via thumbwheel or configuration tool Cat.Nos 0 882 30 and 0 882 35 Time delay adjustable from 5 s to 30 min
1	5 740 47	○ White ● Magnesium ● Champagne ● Soft Alu
1	5 740 97	
1	5 741 41	
1	5 741 40	

Arteor™ dimmers

square version



5 722 38

Support frame and plate selection charts **p. 48 - 51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Universal dimmers
1	5 722 39	Without neutral, 2 wires Push-button dimmer for all types of lamps: - Dimmable LEDs: 75 W - Dimmable compact fluorescent lamps: 75 W - Halogen with transformer: 400 VA - Fluorescent tube: 200 VA - Halogen 230 V and incandescent: 400 W Can be associated with one or several push-buttons without neon, for ON/OFF or dimming control Lights come on again at the same lighting level as before they were last switched off <ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
1	5 727 39	
1	5 729 37	
1	5 729 36	
Dimmers 1-10 V		
1	5 722 38	Push-button dimmer for ballasts 1-10 V <ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
1	5 727 38	
1	5 729 39	
1	5 729 38	

Arteor™ dimmers

round version



5 743 19




5 743 38

Support frame and plate selection charts **p. 48 - 51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Universal dimmers
1	5 743 19	Without neutral, 2 wires Push-button dimmer for all types of lamps: - Dimmable LEDs: 75 W - Dimmable compact fluorescent lamps: 75 W - Halogen with transformer: 400 VA - Fluorescent tube: 200 VA - Halogen 230 V and incandescent: 400 W Can be associated with one or several push-buttons without neon, for ON/OFF or dimming control Lights come on again at the same lighting level as before they were last switched off <ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules ● Soft Alu - 2 modules
1	5 743 39	
1	5 743 10	
1	5 743 10	
Dimmers 1-10 V		
1	5 743 18	Push-button dimmer for ballasts 1-10 V <ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules
1	5 743 38	
Active power compensator		
1	0 401 49	Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W

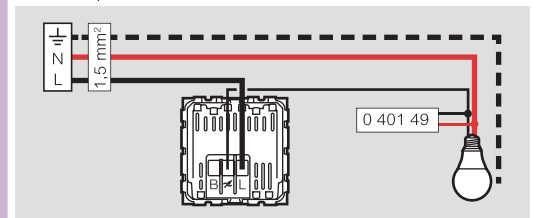

Arteor™ load selection charts

Load selection charts

	Cat.Nos	Universal							
		Leading edge				Trailing edge			
		Incandescent lamp		Halogen lamp		ELV halogen with ferromagnetic transformer		ELV halogen with electronic transformer	
		110 V~	230 V~	110 V~	230 V~	110 V~	230 V~	110 V~	230 V~
Dimmers	5 722 39 5 727 39 5 729 37 5 729 36 5 743 19 5 743 39 5 743 10	200 W	400 W	200 W	400 W	200 VA	400 VA	200 VA	400 VA
Motion sensors	5 740 47 5 740 97 5 741 41 5 741 40	1000 W	2000 W	1000 W	2000 W	500 VA	1000 VA	500 VA	1000 VA

	Cat.Nos	Universal					
		Fluorescent tube		Compact fluorescent lamp		LED	
		110 V~	230 V~	110 V~	230 V~	110 V~	230 V~
Dimmers	5 722 39 5 727 39 5 729 37 5 729 36 5 743 19 5 743 39 5 743 10	100 VA	200 VA	Dimmable 37 W 10 lamps max	Dimmable 75 W 10 lamps max	Dimmable 37 W 10 lamps max	Dimmable 75 W 10 lamps max
Motion sensors	5 740 47 5 740 97 5 741 41 5 741 40	300 W	720 W	250 VA	500 VA	250 VA	500 VA

	Cat.Nos	Ballasts 1-10 V		Reducer motor for shutters	
		110 V~	230 V~	110 V~	230 V~
Dimmers	5 722 38 5 727 38 5 729 39 5 729 38 5 743 18 5 743 38	300 VA 40 mA	600 VA 40 mA	-	-

Arteor™

ventilation, heating, roller blinds control



5 722 18



5 710 52



5 727 20

Arteor™

RCBO and MCB



5 723 61

Support frame and plate selection charts **p. 48**

Mechanisms supplied with square rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Support frame and plate selection charts **p. 48**

Mechanisms supplied with square rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Fan controllers
		2 modules
		AC speed control - 4 positions
1	5 722 17	○ White
1	5 727 17	● Magnesium
1	5 727 87	● Champagne
1	5 727 86	● Soft Alu
		Rotary speed controller for fan
		Operates 40 to 400 VA limit switch For progressive speed control of ceiling fan
1	5 722 18	○ White
1	5 727 18	● Magnesium
1	5 727 97	● Champagne
1	5 727 96	● Soft Alu
		Fan step regulator - 100 W
5	5 722 15	○ White
5	5 727 15	● Magnesium
5	5 727 99	● Champagne
5	5 727 98	● Soft Alu
		Curtain switches
		1 module
		Curtain switch centre off
5	5 722 02	○ White
5	5 727 02	● Magnesium
5	5 700 52	● Champagne
5	5 710 52	● Soft Alu
		Curtain switch centre retract
5	5 722 01	○ White
5	5 727 01	● Magnesium
5	5 727 55	● Champagne
5	5 727 54	● Soft Alu
		Electric roller blind controllers - 250 V~
		For control via automatic box (N/O mechanism)
		Double push-button - 10 A
		2 modules
10	5 722 19	○ White
10	5 727 19	● Magnesium
10	5 729 43	● Champagne
10	5 729 42	● Soft Alu
		For direct control of a motor (mechanism with fixed positions)
		Double push-button - 10 A
		2 modules
10	5 722 20	○ White
10	5 727 20	● Magnesium
10	5 700 54	● Champagne
10	5 710 54	● Soft Alu

Pack	Cat.Nos	Thermal magnetic proximity MCB
		Single pole + Neutral - 230 V~ - 16 A Used for local protection of part in a circuit (e.g. 2P+E socket) against overloads and short-circuits Main protection being close to the user plus discriminating allows immediate reset Can also be used as a local consumption limiter (depending on its rating) Breaking capacity: 3000 A - 2 modules
1	5 723 61	○ White



Products to be submitted to local tests to ensure a perfect functioning
Please contact your local agency

Arteor™ USB chargers



Support frame and plate selection charts **p. 48**


Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	USB Type-A chargers
5	5 720 78 ¹	<p>For recharging portable devices Conform to IEC 60950 Consumption in passive mode < 0.07 W 2P+E tap-off connection via 2 x 2.5 mm² screw terminals Supplied without cord</p> <p>Double USB sockets - 5 V_{DC} - 2.4 A - 12 W For fast charging of smartphones and tablet PC 2 modules</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu</p> <p>Single USB sockets - 5 V_{DC} - 1.1 A - 5.5 W For Smartphone or Powerbank 1 module</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu</p>
1	5 725 78 ¹	
1	5 710 76 ¹	
1	5 700 76 ¹	
10	5 720 71	<p>USB Type-C chargers</p> <p>Used for charging the battery of a portable device without a mobile charger with USB Type-C plug Standby consumption < 0.07 W Conform to IEC 60950 Supplied without cord</p> <p>1 USB Type-A + 1 USB Type-C - 230 V - 5 V_{DC} - 3 A - 15 W 2 modules</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu</p> <p>2 USB Type-C - 230 V - 5 V_{DC} - 3 A - 15 W 2 modules</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu</p> <p>1 USB Type-C - 230 V - 5 V_{DC} - 1.5 A - 7.5 W 1 module</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu</p>
1	5 720 77	
1	5 725 77	
1	5 710 77	
1	5 700 77	
1	5 720 72	
1	5 725 72	
1	5 710 78	
1	5 700 78	
10	5 724 84	
10	5 733 94	
10	5 710 79	
10	5 700 79	

Type-C connectivity

Type-C connector characteristics

USB Type-C : new miniaturised version of the traditional USB connector (Type-A)



Reversible : simplified connection.

For fast charging of devices and high-speed Data, Audio and Video transfers

USB Type-C standardisation

The European Commission and major manufacturers of multimedia devices (smartphones, tablets and laptops) have signed an M.o.U. (memorandum of understanding) aiming to standardise equipment and use of Type-C connectors.


7 leading manufacturers are signatories to the agreement guaranteeing compatibility of their devices with USB Type-C chargers: Samsung, Apple, LG, Google, Sony, Motorola, Lenovo.

Standardisation :

- simplifies connection for users
- optimises charging performance and ensures compatibility
- restricts the need for multiple mobile chargers

Multipurpose cord

The USB Type-C connector aims to replace several connectors so users have a truly multipurpose cord.

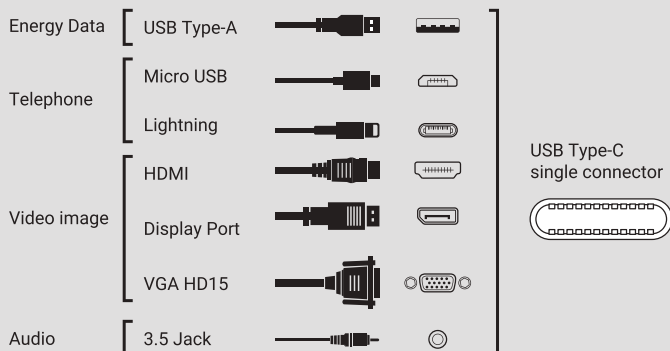

Why install a USB Type-C charger ?

- Latest generation smartphones and tablets are natively equipped with a Type-C port
- As the Type-C connector becomes the universal port, the Type-C cord will enable a multitude of applications (charging and data transfer)
- Delivers up to 15 W to optimise charging
- Environmentally friendly: standby power consumption of 0.07 W Level VI on the TUV scale (highest level)

Arteor™

wireless power chargers



0 775 80 supplied with sticker

0 775 99

5 720 76

Wireless power chargers for fast charging of a smartphone with a Qi receiver

Power supply standby mode consumption < 0.07%
 Conform to the Qi WPC standard (Wireless Power Consortium): certified for professional Qi 1.2.3 projects
 Conform to EN 62479 standard (EMF emissions)
 Conform to ICNIRP specifications (health protection)
 Do not interfere with other wireless signals (Zigbee, TNT, GSM, 4G, etc)


Pack Cat.Nos **Qi wireless chargers - for integration into furniture**

		<p>Specially designed for mounting horizontally on furniture. For meeting rooms, offices, public areas, etc 80 mm drilling diameter, Aluminium colour Extra-slim with thickness < 1.5 mm Supplied with identification sticker diameter 85/110 mm, 2.5 m cord, fixing base and cable ties 110-240 V universal power supply Plugs conforming to European, BS, US, Australian/ Chinese standards To be installed using a hole saw diameter 80 mm (Cat.No 0 885 08)</p>
1	0 775 80	5 W - IP 44 / IK 08 charger
1	0 776 00L	15 W - IP 44 / IK 08 charger



1 0 775 99 **Flush-mounted wireless chargers - for public areas**


1 A - 5 V/5 W wireless charger. Specially designed for public buildings, passageways or transit areas, swimming pools, etc. IK 08 - IP 66 - Class II SELV
 Comes with 2 induction antennae for fast smartphone charging. Recognition area: 50 x 80 mm
 Plate at an angle of 10° with non-slip coating to hold the terminal safely in place during charging
 Screws onto flush-mounting box with 60 mm fixing centres, min. depth 40 mm, French, German or British standard. Can also be fixed in at 4 points.
 Can be mounted on rectangular boxes and outdoors
 110/230 VA Phase + Neutral power supply
 Mechanism supplied with cover plate, attached with 2 Torx screws at the side



● Aluminium colour
 Dimensions: 141 x 95 x 51 mm
 2 x 2.5 mm² terminals

1 5 720 76 **Wireless charger + Type-A USB - Arteor version**

1 A - 5 V/5 W charger with one 2.4 A/12 W USB port to power a second device
 Specially designed for work areas
 For installation in flush-mounting box, surface mounting box, workstation kit, column module, multi-outlet extension for offices, etc
 To be fitted with a support and a plate depending on the selection of the wiring accessories ranges
 Comes with 2 induction antennae for fast intuitive smartphone charging. Recognition area: 50 x 80 mm
 Plate at an angle of 10° with non-slip coating to hold the terminal safely in place during charging
 Dimensions: 136.5 x 70 x 56.5 mm
 Anti-theft lock function
 Suitable for horizontal multi-gang mounting



Metallic finishing plate
 2 x 2.5 mm² terminals

Arteor™

wireless power chargers

Wireless power charging

A Legrand innovation for easy charging


Using wireless energy transfer
 No need for cords and connectors

An open international standard:

Wireless Power Consortium: 750 members, ensuring interoperability with induction-compatible phones
 Qi: global standard adopted by vehicle manufacturers and cafés/hotels/restaurants
 Products certified for professional Qi 1.2.3 projects

Ergonomically designed to suit different environments


Horizontal charging on furniture

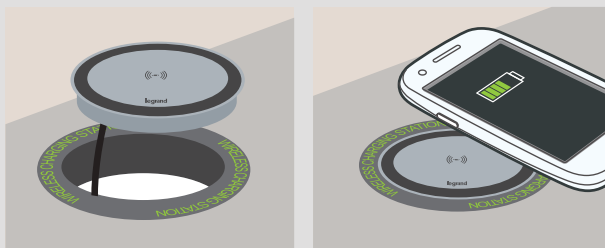

Insertion in an 80 mm diameter cut-out / Fixed into furniture
 External power supply with 2.5 m cord

Vertical charging on a wall in public areas (semi-flush-mounted)


Ideal for indoor or outdoor locations

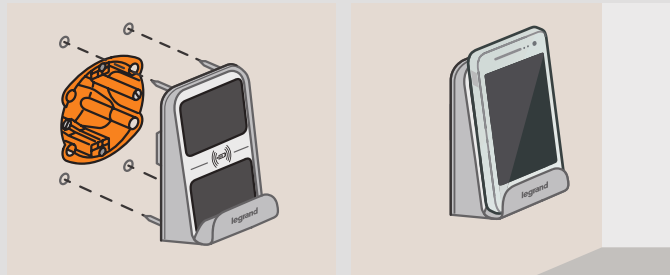

Excellent resistance to impacts (IK 08) and adverse weather conditions (IP 66)
 Can be fixed directly on the flush-mounting box or for extra strength drilled with anchor bolts

Charging in Arteor environment

With induction and 2.4 A / 12 W USB Type-A socket

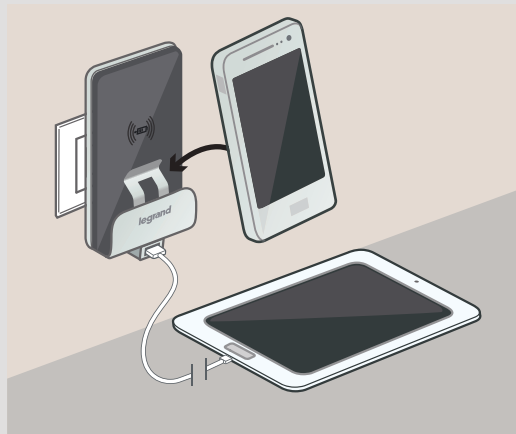

Arteor™

lighting control, emergency push-buttons



5 720 55

Support frame and plate selection charts p. 48-51

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

Pack	Cat.Nos	Time delay switches
		Interference suppression conforming to standard EN 55022 For timer control of a circuit with the following loads: - 1000 W incandescent and halogen 230 V~ - 2300 W resistive (heating) - 400 VA fluorescent and ELV halogen Adjustable from 25 s to 15 min It is possible to install a number of timer switches in parallel on the same circuit With integrated LED 2-wire installation in box min. depth 40 mm 2 modules
1	5 720 55	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 740 84	
1	5 741 38	
1	5 741 37	
		Single pole latching relays 10 A - 250 V~
		Used to bring functions with low breaking capacity close to the application Resistive: 3000 W Incandescent: 1800 W LV halogen: 1800 W Fluorescent: 400 VA Motors (roller blind type): 530 W 2 modules
1	5 722 27	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 727 27	
1	5 729 47	
1	5 729 46	

Arteor™

multistandard socket outlets with USB charger



5 721 38 + 5 751 10



5 721 39 + 5 751 70

Mechanisms supplied with rocker plates, to be equipped with special plates
Support frame not needed

Pack	Cat.Nos	Multistandard switched socket outlets 16 A - 250 V~ / 15 A - 127 V~ with USB charger
		Shuttered for child safety 2P+E - 1 gang USB Type-A 2.4 A - 5 V_{DC} - 12 W Consumption in passive mode < 0.08 W
1	5 721 38	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 38	
1	5 710 83	
1	5 700 83	
		2P+E - 1 gang USB Type-C 3 A - 5 V_{DC} - 15 W Consumption in passive mode < 0.08 W
1	5 721 62	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 62	
1	5 722 62	
1	5 722 64	
		2 x 2P+E - 2 gang USB Type-A + Type-C 3 A - 5 V_{DC} - 15 W Consumption in passive mode < 0.08 W
1	5 721 39	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 39	
1	5 710 84	
1	5 700 84	
		Special plates for Arteor multistandard socket outlets with USB charger
		For 1 gang switched mechanism
5	5 751 10	<ul style="list-style-type: none"> ○ Neutral - White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze ● Brushed Metal - Stainless Steel
5	5 751 44	
5	5 751 43	
5	5 751 45	
5	5 751 46	
5	5 751 47	
1	5 751 16	
		For 2 gang switched mechanism
5	5 751 70	<ul style="list-style-type: none"> ○ Neutral - White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze ● Brushed Metal - Stainless Steel
5	5 751 72	
5	5 751 71	
5	5 751 73	
5	5 751 74	
5	5 751 75	
1	5 751 76	

Arteor™

international socket outlets



Support frame and plate selection charts [p. 48-51](#)

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

Pack	Cat.Nos	Multistandard socket outlets
10	5 721 23	2P+E unswitched - shuttered for child safety - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 726 23	
10	5 700 42	
10	5 710 42	
5	5 721 35	2P+E switched - shuttered for child safety - 3 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 726 35	
5	5 724 42	
5	5 724 41	

Pack	Cat.Nos	Euro-US type socket outlets - 15 A -127 V / 16 A - 250 V
10	5 721 04	2P with shutters - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 726 04	
10	5 700 37	
10	5 710 37	
10	5 721 16 ¹	2P+E with shutters - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 726 16 ¹	
10	5 700 39 ¹	
10	5 710 39 ¹	
5	5 721 33	2 x 2P+E with shutters - 3 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 726 33	
5	5 700 46	
5	5 710 46	

Arteor™

telephone sockets



Arteor™

television sockets



Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

Pack	Cat.Nos	RJ 11 and RJ 12 sockets
		Equipped with modular Jack connector with 1/4 turn terminal for fast connection (possible looping)
		RJ 11 - 1 module
		4 contacts
10	5 723 00	○ White
10	5 728 00	● Magnesium
10	5 700 56	● Champagne
10	5 710 56	● Soft Alu
		RJ 11 - 2 modules
		4 contacts
10	5 723 13 ¹	○ White
10	5 728 13 ¹	● Magnesium
10	5 726 83 ¹	● Champagne
10	5 726 82 ¹	● Soft Alu
		RJ 12 - 2 modules
		6 contacts
10	5 723 12 ¹	○ White
10	5 728 12 ¹	● Magnesium
10	5 726 85 ¹	● Champagne
10	5 726 84 ¹	● Soft Alu

Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

For Dvbt, Cablecast and satellite installation
 UHD TV quality compatible
 Classe A shielded star socket LTE ready (4G protected)
 Recommended coaxial cable: 17 VATCA
 Star cabling (1 socket = 1 cable to antenna, splitter or multiswitch)
 Visual check of the connection
 Meets EN 50083-4 and EN 50083-2 European directive
 TV: male connector (Ø9.5 mm) - 5-68 /120-862 MHz
 R: female connector (Ø9.5 mm) - FM 87.5-108 MHz / DAB 174-223 MHz
 SAT: "F" type connector - 950-2400 MHz

Pack	Cat.Nos	Multi TV star sockets
		2 modules
		TV-R-SAT sockets
		Radio FM + DAB+
		Low attenuation: 1.5 dB
10	5 721 72 ¹	○ White
10	5 726 72 ¹	● Magnesium
10	5 726 91 ¹	● Champagne
10	5 726 90 ¹	● Soft Alu

Pack	Cat.Nos	Single TV star sockets - 1 module
		Low attenuation 1dB
		TV 9.5 mm male sockets
10	5 721 71	○ White
10	5 726 71	● Magnesium
10	5 700 51	● Champagne
10	5 710 51	● Soft Alu
		TV "F" type sockets
10	5 721 63	○ White
10	5 726 63	● Magnesium
10	5 700 50	● Champagne
10	5 710 50	● Soft Alu

Arteor™

RJ 45 sockets



5 723 06 5 728 02 5 700 57 5 710 57 5 723 24 5 728 16

Support frame and plate selection charts **p. 48-51**

Can be integrated in any support
Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)
Equipped with connectors with quick toolless connection
Take single-core cables from AWG 22 up to AWG 26, and AWG 26 multicore cables T568A and B marking with colour codes
Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Pack Cat.Nos **Cat. 6_A sockets**

Pack	Cat.Nos	360° metal shielding
10	5 723 06	STP - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 06	
10	5 728 46	
10	5 728 45	
10	5 723 49	UTP - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 49	
10	5 728 65	
10	5 728 64	

Pack Cat.Nos **Cat. 6 sockets**

Pack	Cat.Nos	UTP - 1 module
10	5 723 02	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 02	
10	5 700 57	
10	5 710 57	
10	5 723 141	UTP - 2 modules <ul style="list-style-type: none"> ○ White - square version ● Magnesium - square version ● Champagne - square version ● Soft Alu - square version
10	5 728 141	
10	5 700 591	
10	5 710 591	
10	5 723 24	<ul style="list-style-type: none"> ○ White - round version ● Magnesium - round version ● Soft Alu - round version
10	5 728 24	
10	5 728 81	
10	5 728 81	
10	5 723 22	FTP - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 22	
10	5 728 91	
10	5 728 90	
10	5 723 161	FTP - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 161	
10	5 728 931	
10	5 728 921	
10	5 723 23	STP shielded - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 23	
10	5 728 95	
10	5 728 94	
10	5 723 17	STP shielded - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 17	
10	5 728 97	
10	5 728 96	

Arteor™

RJ 45 sockets (continued)



5 723 15

Support frame and plate selection charts **p. 48-51**

Can be integrated in any support
Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)
Equipped with connectors with quick toolless connection
Take single-core cables from AWG 22 up to AWG 26, and AWG 26 multicore cables T568A and B marking with colour codes
Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Pack Cat.Nos **Cat. 5e sockets**

Pack	Cat.Nos	UTP - 1 module
10	5 723 03	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 03	
10	5 700 58	
10	5 710 58	
10	5 723 151	UTP - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 151	
10	5 728 991	
10	5 728 981	
10	5 723 04	FTP - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 04	
10	5 729 08	
10	5 729 07	

Arteor™

adaptors for data sockets



Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

Pack Cat.Nos Adaptors for Keystone data sockets

Pack	Cat.Nos	Adaptors for Keystone data sockets
		Equipped with transparent label-holder
		Single connector - 2 modules
10	5 723 37	○ White
10	5 728 37	● Magnesium
10	5 729 32	● Champagne
10	5 729 31	● Soft Alu

Pack Cat.Nos Adaptors for Systimax data sockets

Pack	Cat.Nos	Adaptors for Systimax data sockets
		Equipped with transparent label-holder
		Single connector - 2 modules
10	5 723 38	○ White
10	5 728 38	● Magnesium
10	5 729 34	● Champagne
10	5 729 33	● Soft Alu

Arteor™

USB data sockets



Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

Pack Cat.Nos USB data sockets for data transfer

Pack	Cat.Nos	USB data sockets for data transfer
		Used to bring connections closer to the user For connecting USB devices (interactive white board, scanner-printer, external hard disk)
		Preterminated - USB 3.0 - 1 module
		Maximum length: 5 m Recommended cable: USB A Equipped with a 15 cm cord
1	5 720 94	○ White
1	5 725 94	● Magnesium
1	5 725 76	● Champagne
1	5 725 75	● Soft Alu
		Connection via screw terminals - USB 2.0
		1 module
		Maximum length: 5 m Recommended cable: USB A Cross-section 1 mm ²
1	5 722 75	○ White
1	5 727 75	● Magnesium
1	5 725 53	● Champagne
1	5 725 52	● Soft Alu
		USB Data extender
		Used to bring connections closer to the user in case of large distances. For connecting USB devices (digital school board / interactive whiteboard...) located more than 5 m away (30 m max.) from a source (computer...)
		The kit includes
		- a transmitter (1 module)
		- a receiver (1 module)
		The link between the transmitter and the receiver is made via a RJ 45/RJ 45 cord
1	5 720 23	○ White




 Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

Pack	Cat.Nos	HDMI type A sockets
		Used to transmit high-definition digital audio/video streams between a source (Blu-ray player, computer) and a compatible receiver (TV, videoprojector...)
		Preterminated sockets HDMI 1.4 - 1 module Equipped with cord, length 15 cm
1	5 720 96	○ White
1	5 725 96	● Magnesium
1	5 725 18	● Champagne
1	5 725 17	● Soft Alu
		Preterminated sockets HDMI 1.4 - 2 modules Equipped with cord, length 15 cm
1	5 722 99	○ White - square version
1	5 725 99	● Magnesium - square version
1	5 723 46	● Champagne - square version
1	5 723 45	● Soft Alu - square version
1	5 724 76	○ White - round version
1	5 735 96	● Magnesium - round version
1	5 725 19	● Soft Alu - round version

Pack	Cat.Nos	Display port sockets
		Used to transmit high-definition digital audio/video streams between a source (laptop, computer, etc) and a compatible receiver (TV, videoprojector...)
		Preterminated socket - 1 module Equipped with cord, length 15 cm
1	5 720 90	○ White
1	5 725 90	● Magnesium

Pack	Cat.Nos	HD15 sockets
		Used to transmit analog video streams (VGA, XGA, UXGA depending on graphic card) between a source (computer) and a compatible receiver (LCD, video projector, TV, etc...)
		Preterminated sockets - 1 module Equipped with cord, length 15 cm
1	5 720 97	○ White
1	5 725 97	● Magnesium
		Solder-type female HD15 sockets - 1 module 15 pin
1	5 722 79	○ White
1	5 727 79	● Magnesium

 USB data sockets see **p. 43**


Arteor™

audio and video sockets (continued)



Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)

Pack Cat.Nos Jack sockets 3.5 mm

		3.5 mm Jack connectors can be used to create audio links
		Preterminated sockets - 1 module Equipped with cord, length 15 cm
1	5 720 91	○ White
1	5 725 91	● Magnesium
1	5 725 59	● Champagne
1	5 725 55	● Soft Alu
		Solder-type female 3.5 mm Jack socket 1 module
1	5 722 78	○ White
1	5 727 78	● Magnesium

Female 2 RCA sockets

		Provide the stereo audio link for any peripheral device such as a DVD drive, camera, video recorder
		Preterminated - 1 module Equipped with a 15 cm cord
1	5 720 92	○ White
1	5 725 92	● Magnesium
1	5 724 79	● Champagne
1	5 724 75	● Soft Alu
		Connection on screw terminals - 1 module
1	5 722 72	○ White
1	5 727 72	● Magnesium
1	5 724 95	● Champagne
1	5 724 94	● Soft Alu

Pack Cat.Nos 3-pole XLR sockets

		For the stereo connection of any peripheral, microphone, mixing console Recommended cable: 1 audio pair 0.14 to 0.5 mm ² shielded Max. cable length: 50 m (beyond this an audio amplifier is recommended) 2 modules
		XLR female
1	5 722 83	○ White
1	5 727 83	● Magnesium
1	5 724 99	● Champagne
1	5 724 98	● Soft Alu
		XLR male
1	5 722 77	○ White
1	5 727 77	● Magnesium

Loudspeaker sockets

		4 mm ² terminals
		1 module
10	5 722 70	○ White
10	5 727 70	● Magnesium
10	5 726 97	● Champagne
10	5 726 96	● Soft Alu

Attenuators

		100 V - 25 W Allow to adjust power to 25 W from a balanced 100 V loudspeaker line 2 modules
1	5 722 84	○ White
1	5 727 84	● Magnesium

Media hub see **p. 59**





5 760 03

5 760 01



5 760 00

 Plate selection charts **p. 48-51**

Pack	Cat.Nos	Support frames for BS type boxes 60.3 mm fixing centres
10	5 760 03	Screw mounting (screws supplied) For 1 gang box Square - for 1 or 2 modules
5	5 760 01	Square - for 3 modules
10	5 760 02	For 2 gang box Rectangular - for 3 modules
10	5 760 00	Rectangular - for 2 x 2 modules

Pack	Cat.Nos	Support frame for Italian type boxes 83.5 mm fixing centres
10	5 760 40	Screw mounting For 1 to 3 modules



5 728 41

5 700 60

5 731 86

 Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48-51)


Pack	Cat.Nos	Blank modules
10	5 723 41	1 module ○ White - square version ● Magnesium - square version ● Champagne - square version ● Soft Alu - square version
10	5 728 41	
10	5 700 60	
10	5 710 60	
10	5 723 42	2 modules ○ White - square version ● Magnesium - square version ● Champagne - square version ● Soft Alu - square version
10	5 728 42	
10	5 700 61	
10	5 710 61	
10	5 730 86	3 modules ○ White - round version ● Magnesium - round version ● Soft Alu - round version
10	5 731 86	
10	5 731 88	
5	5 723 43	3 modules ○ White - square version ● Magnesium - square version ● Champagne - square version ● Soft Alu - square version
5	5 728 43	
5	5 728 20	
5	5 728 19	

Arteor™

blinking cover plates



5 716 08

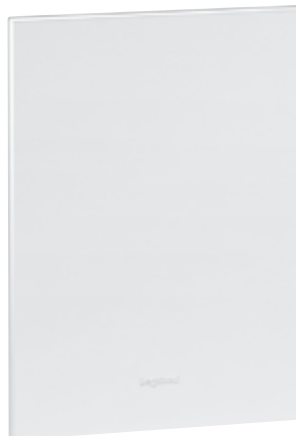

5 754 10

Support frame and plate selection charts **p. 48-51**

To be equipped with support frames (p. 46) and plates (p. 48-51)

Pack	Cat.Nos	British standard blanking cover plates
5	5 751 30	For 1 gang box <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze
5	5 716 08	
5	5 751 32	
5	5 716 10	
5	5 716 12	
5	5 716 14	
5	5 751 40	For 2 gang box <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze
5	5 716 09	
5	5 751 42	
5	5 716 11	
5	5 716 13	
5	5 716 15	

Pack	Cat.Nos	Italian/US standard blanking cover plates
10	5 754 10	For 2" x 4" boxes <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze
10	5 714 10	
10	5 754 12	
10	5 714 52	
10	5 714 53	
10	5 714 51	
5	5 753 60	US standard blanking cover plates For 4" x 4" boxes <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Champagne
5	5 714 00	
5	5 753 62	
5	5 753 64	

Arteor™ British standard plate selection charts

60.3 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Neutral					
				White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
SQUARE VERSION									
1 module	1 gang	5 760 03		5 752 00	5 713 01	5 752 02	5 713 11	5 713 21	5 713 31
2 modules		5 760 03 5 760 01 ⁽¹⁾		5 752 10	5 713 02	5 752 12	5 713 12	5 713 22	5 713 32
3 modules - 1 gang	1 gang	5 760 01		5 751 60	5 713 03	5 751 62	5 713 13	5 713 23	5 713 33
3 modules and shaver sockets	2 gang	5 760 02		5 750 70	5 713 05	5 750 72	5 713 15	5 713 25	5 713 35
4 modules	2 gang	5 760 00		5 750 80	5 713 04	5 750 82	5 713 14	5 713 24	5 713 34
6 modules	6 890 36	Supplied with support frame		5 753 70	5 713 06	5 753 72	5 713 16	5 713 26	5 713 36
8 modules	6 890 38	Supplied with support frame		5 767 00	5 713 08	5 767 02	5 713 18	5 713 28	5 713 38
Blanking cover plate	1 gang	5 760 03 5 760 01		5 751 30	5 716 08	5 751 32	5 716 10	5 716 12	5 716 14
Blanking cover plate	2 gang	5 760 02		5 751 40	5 716 09	5 751 42	5 716 11	5 716 13	5 716 15
ROUND VERSION									
2 modules	1 gang	5 760 03		5 756 10	5 716 16	5 756 12	5 716 21	-	

1: Use 5 760 01 support frame for 2 module mechanisms to be mounted on 3 module support frame (see mention in catalogue page)

Arteor™ German and French standard plate selection charts

60 mm fixing centres - flush and surface-mounting boxes, support frames and plates

Number of modules per mechanism	Surface-mounting boxes	Flush-mounting boxes for dry partitions	Support frames	Plates	PLATES					
					Neutral					
					White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
3 x 2 modules	-	0 800 43	3 x 5 760 21		5 750 50	5 715 64	5 750 52	5 750 57	5 715 84	5 715 94

PLATES											
Mirror		Brushed Metal				Reflective Metal			Wood	Signature	
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube	
5 752 04	5 752 03	5 752 06	5 761 00	5 713 51	5 713 41	5 713 61	5 713 81	5 713 71	5 713 91	5 714 01	
5 752 14	5 752 13	5 752 16	5 761 20	5 713 52	5 713 42	5 713 62	5 713 82	5 713 72	5 713 92	5 714 02	
5 751 64	5 751 63	5 751 66	5 761 80	5 713 53	5 713 43	5 713 63	5 713 83	5 713 73	5 713 93	5 714 03	
5 750 74	5 750 73	5 750 76	5 761 60	5 713 55	5 713 45	5 713 65	5 713 85	5 713 75	5 713 95	5 714 05	
5 750 84	5 750 83	5 750 86	5 761 40	5 713 54	5 713 44	5 713 64	5 713 84	5 713 74	5 713 94	5 714 04	
5 753 74	5 753 73	5 753 76	5 763 70	5 713 56	5 713 46	5 713 66	5 713 86	5 713 76	5 713 96	5 714 06	
5 767 04	5 767 03	5 767 06	5 767 10	5 713 58	5 713 48	5 713 68	5 713 88	5 713 78	5 713 98	5 714 08	
-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	
5 756 14	5 756 13	5 756 16	5 761 10	5 716 30	5 716 26	-	-	-	-	-	

PLATES											
Mirror		Brushed Metal				Reflective Metal			Wood	Signature	
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube	
5 750 54	5 750 53	5 750 56	-	5 715 69	5 715 59	5 715 79	5 715 99	5 715 89	-	-	

Arteor™ Italian / US standards plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates


Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Neutral					
				White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
SQUARE VERSION									
1 module	0 800 49	5 760 40		5 752 20	5 714 11	5 752 22	5 752 27	5 714 31	5 714 41
2 modules	0 800 49	5 760 40		5 752 30	5 714 12	5 752 32	5 752 37	5 714 32	5 714 42
3 modules	0 800 49	5 760 40		5 750 10	5 714 13	5 750 12	5 750 17	5 714 33	5 714 43
Blanking cover plate	2" x 4"	5 760 40		5 754 10	5 714 10	5 754 12	5 714 52	5 714 53	5 714 51
4 modules	0 800 42	5 760 11		5 750 30	5 714 14	5 750 32	5 750 37	5 714 34	5 714 44
6 modules	0 800 43	5 760 12		5 750 40	5 714 15	5 750 42	5 750 47	5 714 35	5 714 45
ROUND VERSION									
2 modules	0 800 49	5 760 40		5 756 20	5 716 34	5 756 22	5 716 36	-	-
ARTEOR SPECIAL PLATES									
MyHOME screen 3.5"		Not needed		-	-	-	-	-	-
Central unit for temperature control	Supplied with box	Not needed		-	-	-	-	-	-

PLATES

Mirror		Brushed Metal			Reflective Metal			Wood	Signature	
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
										
5 752 44	5 752 43	5 752 46	5 764 10	5 714 26	5 714 16	5 714 36	5 714 56	5 714 46	5 714 66	5 714 76
5 752 54	5 752 53	5 752 56	5 764 30	5 714 27	5 714 17	5 714 37	5 714 57	5 714 47	5 714 67	5 714 77
5 752 74	5 752 73	5 752 76	5 764 50	5 714 28	5 714 18	5 714 38	5 714 58	5 714 48	5 714 68	5 714 78
-	-	-	-	-	-	-	-	-	-	-
5 750 34	5 750 33	5 750 36	5 762 70	5 714 29	5 714 19	5 714 39	5 714 59	5 714 49	5 714 69	-
5 750 44	5 750 43	5 750 46	5 762 80	5 714 30	5 714 20	5 714 40	5 714 60	5 714 50	5 714 70	-
5 756 34	5 756 33	5 756 36	5 764 20	5 716 40	5 716 38	-	-	-	-	-
5 764 84	5 764 83	-	-	-	-	5 764 86	-	-	-	-
5 765 24	5 765 23	-	-	-	-	-	-	-	-	-

Guest room management system


ENTRANCE AREA

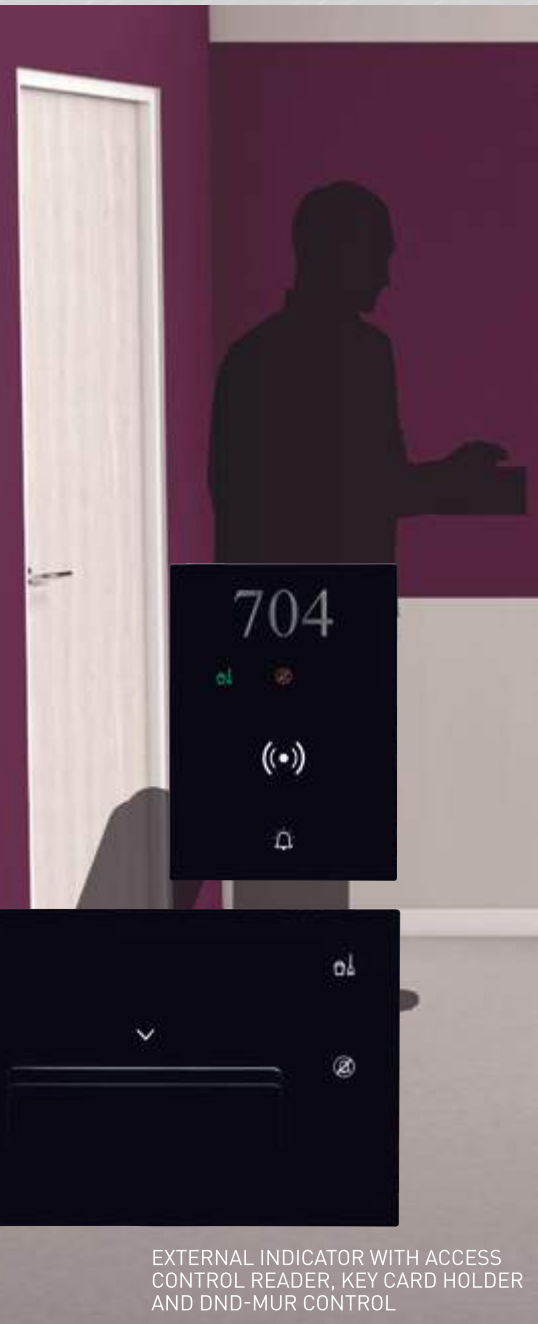

EXTERNAL INDICATOR WITH ACCESS CONTROL READER, KEY CARD HOLDER AND DND-MUR CONTROL



LIVING AREA

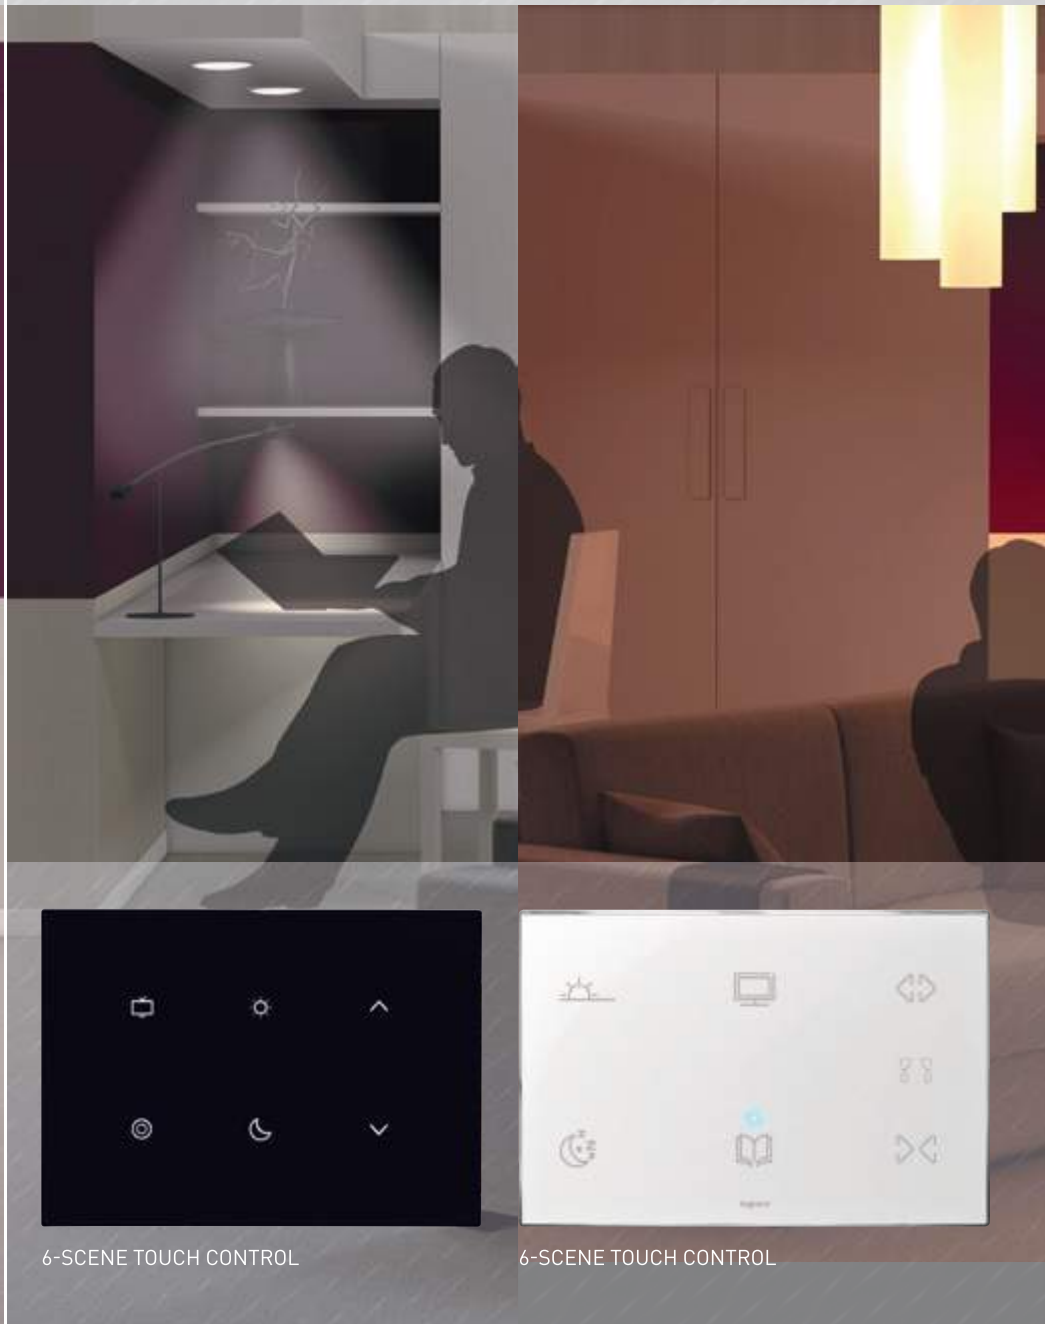

6-SCENE TOUCH CONTROL




6-SCENE TOUCH CONTROL





SLEEPING AREA

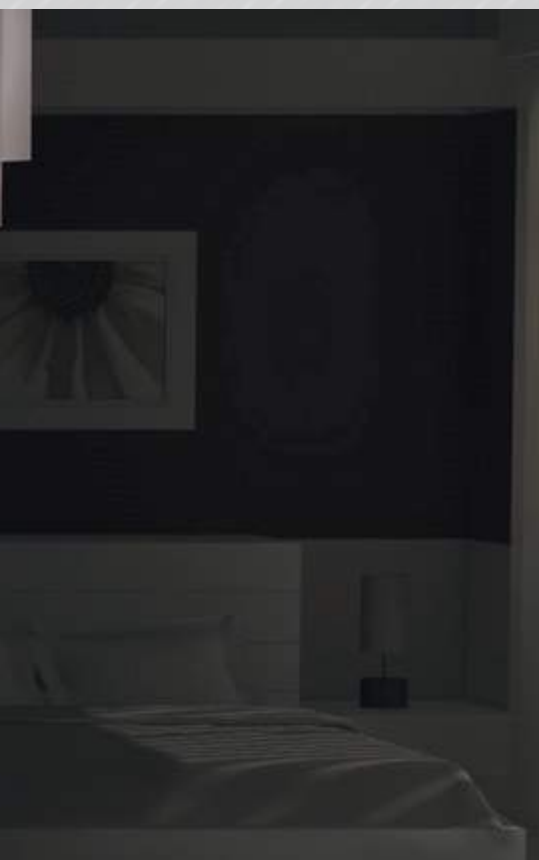

Thanks to the Legrand Guest Room Management System, different scenes can be set in each guest room for a new and unique experience.

The objective is to consistently satisfy guests' needs and expectations in their rooms. They will appreciate the ability to control the lighting, the curtains, the temperature and the fan control unit easily through the user friendly interfaces. Using Legrand multimedia connectivity solutions, your guests will be able to connect and use their high-tech equipment in their rooms.



BEDSIDE PANEL WITH 6 SCENES AND TEMPERATURE CONTROL



DIGITAL THERMOSTAT

> **Arteor** version
(p. 56)





5 740 89



0 675 92 + plate Reflective Black
5 713 82





0 674 59 + plate Cube 5 714 02







5 739 05



Support frame and plate selection charts **p. 48-51**

Pack	Cat.Nos	
1 1	5 740 89 5 745 89	Touch control scenario controllers 4-scene touch control - 4 scenarios "wake up / sleep / TV / relax" scenarios - 2 modules Touch control plates, supplied complete, to be installed in BS flush-mounting boxes  ○ White ● Black
1	0 675 92	Scenario controller 8 push-buttons control for lighting, automation, sound diffusion and scenario functions For controlling a number of controllers and managing 4 scenarios 4 scenarios 2 modules Equipped with cover plates Supplied complete with scenario identification label To be equipped with support frame and plates (p. 48-51) 
1 1	0 675 96 0 675 95	Accessories A5 sheets For the customisation of the symbols of Cat.No 0 675 92 ○ White ● Magnesium

Pack	Cat.Nos	
1 1	5 739 04 5 739 05	Multi-functions touch control mechanisms For controlling 1 or 2 controllers (eg: ON/OFF, shutters, scenario control) sound system, door release control, dimming: gradual switching on or off depending on the selected configuration Supplied complete, equipped with white or black touch plates To be installed in flush-mounting boxes Up to 4 scenarios - 2 modules ○ White - for BS flush-mounting boxes ● Black - for BS flush-mounting boxes 
1 1	5 739 06 5 739 07	○ White - for 2"x 4" flush-mounting boxes ● Black - for 2"x 4" flush-mounting boxes 
1 1	5 739 12 5 739 13	Up to 6 scenarios - 3 modules For installation in BS, Italian or US flush-mounting boxes ○ White ● Black 
1	0 674 59	Display thermostat  Flush mounted thermostat with backlit display. To be equipped with Arteor support frame and plates (p. 48-51) Can be used to control the temperature of an individual zone, both if a temperature central unit is and is not present. Features a temperature probe and an input for the connection of a contact line (e.g. window contact). Can be used for the management of different types of systems, and the adjustment of the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems 2 modules



Hotel equipment

Arteor BUS (continued)



0 675 90 + plate Reflective
Stainless Steel 5 713 62



0 675 93 + key plate
5 743 97 + plate Mirror Black 5 752 13

Support frame and plate selection charts p. 48-51

Pack	Cat.Nos	Keycard switches BUS/SCS
1	5 722 35	<p>Equipped with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51) For energizing a circuit by inserting a key fob Time delay of approx. 30 sec. after card removal Lighting of the slot by LED 2 modules</p> <p>Mechanical keycard switch</p> <p> ○ White ● Magnesium</p>
1	5 727 35	
1	5 722 36	<p>RFID keycard switch Only works with ISO 13.56 MHz badges</p> <p> ○ White ● Magnesium</p>
1	5 727 36	
1	0 675 90	<p>DO NOT DISTURB – MAKE UP THE ROOM control indicators</p> <p>To be equipped with support frames (p. 46) and plates (p. 48 to 51)</p> <p> External indicator and bell pushbutton</p>
1	0 675 91	
1	0 675 93	<p>DO NOT DISTURB – MAKE UP ROOM mechanism to be equipped</p> <p>Mechanism</p> <p> 2 modules To be equipped with key cover, support frames (p. 46) and plates (p. 48 to 51)</p>
5	5 743 46	<p>Cover plates with DO NOT DISTURB symbol - 2 modules</p> <p> ○ White ● Magnesium</p>
5	5 743 47	
5	5 743 48	<p>○ White ● Magnesium</p>
5	5 743 49	
2	5 743 94	<p>Couple of cover plates with DO NOT DISTURB symbol and MAKE UP ROOM symbol</p> <p> ○ White ● Magnesium</p>
2	5 743 95	
2	5 743 96	<p>○ White ● Magnesium</p>
2	5 743 97	

Hotel equipment

equipment for reception, room and infrastructure



348402



MH201



F458

Pack	Cat.Nos	Reception products
5	0 675 89	<p>Badge - key card</p> <p> Credit card shaped badge (ISO 50 x 80 mm) It uses transponder technology with frequency 13.56 MHz To be used with programmer Cat.No 348402 The badge can be customized and is sold in packs of 10</p>
1	348402	<p>Programmer</p> <p> Desk device to be connected to the PC (at the reception) to program badges</p>
1	MH201	<p>Room products</p> <p>IP scenario module</p> <p> Manages scenarios related to hotel rooms (With basic time and logic conditions) Works as a gateway for the Configuration software</p> <p>Bacnet Room Controller Units</p> <p>Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by BUS SCS controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts)</p>
1	0 484 08	8 inputs - 10 outputs 8 DIN modules 17.5 mm
1	0 484 12	16 inputs - 16 outputs 12 DIN modules 17.5 mm
1	F458	<p>Infrastructure products</p> <p>To be associated with Cat.No MH201</p> <p>IP server</p> <p> To be used in systems with over 100 rooms or zones (over 100 Cat.Nos 0 035 96 installed) 6 DIN modules 17.5 mm</p>
1	F459	<p>Driver manager</p> <p> Integration platform with other brand systems 6 DIN modules 17.5 mm Contact the agency to check the feasibility of specific integrations and to request the licence needed to use the Driver manager</p> <p>Softwares</p> <p>Software for the monitoring of the status of the room, for the corresponding basic management and the programming of badges</p>
1	3544SW	For hotels with up to 20 rooms
1	3546SW	For hotels over 20 rooms



0 487 77



0 487 74



0 487 72



0 487 73

Pack	Cat.Nos	Scenario controllers
1	0 487 77	To be equipped with support frame Cat.No 0 487 79 (p. 57) 2-scene and DO NOT DISTURB – MAKE UP ROOM activation 4 gang touch plate wake up, sleep, DO NOT DISTURB – MAKE UP ROOM ● Black
1	0 487 74	6-scene activation 6 gang touch plate wake up, sleep, TV, Master OFF, Open/close curtains ● Black

Pack	Cat.Nos	Bedside panel BUS/SCS
1	0 487 72	Temperature control, DO NOT DISTURB activation and 5 scenes controls (Master OFF, wake up, sleep, TV, reading) To be equipped with support frame Cat.No 0 487 79 (p. 57) ● Black
1	0 487 73	Display thermostat ● Black Features a temperature and humidity probe and an input for connecting a contact line (e.g. window contact) Can be used to manage different types of systems, and to adjust the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems To be equipped with support frame Cat. No 0 487 79

 Product customisation possible using software available on www.uxforupscalehotel.legrand.com



Hotel equipment - user interfaces



BUS (continued)



0 487 76



0 487 70

Pack	Cat.Nos	Control indicators for room management
1	0 487 75	<p>To be equipped with support frame Cat.No 0 487 79</p> <p>DO NOT DISTURB – MAKE UP ROOM external indicator and bell push-button</p> <p>● Black</p>
1	0 487 76	<p>DO NOT DISTURB – MAKE UP ROOM external indicator and bell push-button + badge reader</p> <p>● Black</p>
1	0 487 78	<p>Movement detector</p> <p>PIR sensor for virtual key-card function To be installed in false ceiling Ø20 mm It detects guest presence and activates room functions</p>
1	0 487 70	<p>Keycard switches BUS/SCS</p> <p>DO NOT DISTURB – MAKE UP ROOM activation 2 modules To be equipped with support frame Cat.No 0 487 79</p> <p>Keycard reader with badge discrimination (guest or staff)</p> <p>● Black Enable launching of different actions depending on guest or staff incoming</p>
1	0 487 71	<p>Keycard holder</p> <p>Only works with ISO 13.56 MHz badges</p> <p>● Black</p>
1	0 487 79	<p>Accessories</p> <p>Support frame</p> <p>For flush mounting in 2 and 3 modules flush-mounting boxes</p>
1	0 487 88	<p>Flush mounting accessory</p> <p>For extra-slim flush-mounting installation (e.g. furniture) Replace use of support frame Cat.No 0 487 79</p>



5 735 02 + plate Graphite
5 756 12



5 735 03 + plate Gold Brass
5 761 00



5 735 12



0 490 31



0 674 64 + plate Cube 5 714 02



Support frame and plate selection charts p. **xxx-xxx** and **xxx-xxx**
Key covers selection chart p. **xxx-xxx**

Directly connected to the KNX BUS (supplied with KNX connectors)
Programming through ETS software

Pack	Cat.Nos	Arteor KNX control mechanisms
1	0 675 71	<p>For lighting control (ON/OFF, dimming, scenario...), shutters and slats controls and automation control. Equipped with programmable LEDs (12 colours available) to indicate the status of the loads and provide system and alarm status feedback.</p> <p>Mechanism to be equipped - 4 actuation points 2 modules To be equipped with key covers (p. 46) support frames and plates (p. 48-51)</p> <p>4 actuation points With label holder To be equipped with support frames and plates (p. 48 to 51)</p> <p><input type="radio"/> White - square version <input type="radio"/> Magnesium - square version</p> <p><input type="radio"/> White - round version <input type="radio"/> Magnesium - round version</p> <p>Touch control mechanisms - 4 actuation points Supplied with glass plates Upon request, customization of plates possible with any other standard symbols (please contact us)</p> <p><input type="radio"/> White <input type="radio"/> Black</p> <p>Touch control mechanisms - 6 actuation points Supplied with glass plates Upon request, customization of plates possible with any other standard symbols (please contact us)</p> <p><input type="radio"/> White <input type="radio"/> Black</p>
1	5 742 03	
1	5 744 04	
1	5 735 02	
1	5 735 03	
1	5 735 04	
1	5 735 05	
1	5 735 12	
1	5 735 13	

Pack	Cat.Nos	Room Controller Units
1	0 484 18	<p>Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by BUS/KNX controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts). Multiphase connection and consumption measurement.</p> <p>8 inputs - 10 outputs 8 DIN modules 17.5 mm</p>
1	0 484 22	<p>16 inputs - 16 outputs 12 DIN modules 17.5 mm</p>
1	0 490 31	<p>KNX thermostat</p> <p>For fan coil units: 2 tubes, 2 tubes + 2 wires and 4 tubes for heating and/or air conditioning For controlling on/off valves, 3 positions and 3 speeds (fan): comfort, economy and protection with manual or automatic selection. Adjustment accuracy + 0.5 °C 2 multi-function inputs for window contacts, summer/winter changeover, etc. Backlit display Operating voltage 230 V~ Supplied complete with dedicated flush-mounting box</p> <p><input type="radio"/> White</p>
1	0 674 64	<p>Arteor temperature control</p> <p>1,6" backlight display with 4 push-buttons and embedded a temperature probe Used to manage different types of heating/cooling system (FCU, heating/cooling valve, fan, electric load, ...) in combination through KNX with dedicated HVAC controller (for details see dedicated KNX brochure) - monitoring the ambient temperature with desired unit - adjustment of the temperature set-point and/or fan speed - selection of operating mode (comfort, protection) To be installed in flush-mounting boxes 2 modules To be equipped with support frames and plates (p. 48-51)</p>

Hotel equipment

Arteor wiring devices



5 722 69



5 710 55



5 722 53



0 767 11



5 721 53

Support frame and plate selection charts **p. 48-51**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	MediaHub
1	5 722 69	<p>Allows the user to:</p> <ul style="list-style-type: none"> - watch films from a PC or camcorder on TV: HDMI socket - watch the content of a USB stick on TV: 1 A USB Data socket - charge devices: USB socket (total power 3 A) - listen to music from a smartphone, tablet, etc on TV: Bluetooth function <p>Inputs: 2 USB chargers including 1 USB Data, HDMI, Bluetooth audio Output: HDMI and USB Data Power supply with transformer provided 2 modules</p> <p> ○ White ● Magnesium</p>
1	5 727 69	

Pack	Cat.Nos	Mechanical key card switches
1	5 722 30	<p>For energizing a circuit by inserting a key fob Cat.No 5 722 59 or a smart card (access card for a hotel room) Example of use: hotel room power supply only when guest is present Time-delay of approx. 30 sec. after card removal To be equipped with single pole latching relay Cat.Nos 5 722 27 or 5 727 27 (p. 39) 2 modules</p> <p>Key card switches 230 V</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu</p>
1	5 727 30	
1	5 700 55	
1	5 710 55	

Pack	Cat.Nos	Key card switches RFID
1	5 722 53	<p>For energizing a circuit for example meeting room, office, hotel room... Works only with ISO type contactless key card Cat.Nos 0 767 11/12/13 or other ISO type 13.56 MHz key card Time-delay of approx. 30 sec. after card removal Low capacity contact 230 V - 30 VA Lighting of the slot by LED 2 modules</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu</p>
1	5 727 53	
1	5 727 37	
1	5 722 37	

Pack	Cat.Nos	Key card switches
10	5 722 59	<p>For mechanical key card switches Enable use of key fob switches in hotels with key locks Supplied complete with a label holder for individual hotel identification</p> <p> ○ White ● Magnesium</p>
10	5 727 59	
10	0 767 11	<p>For RFID key card switches MIFARE contactless badge card ISO format (50 x 80 mm) Chip: 13.56 MHz Standard 1 KB memory</p>

Pack	Cat.Nos	Shaver sockets
1	5 721 55	<p>Conform to BS EN 61558-2-5. IP 24 For use with European, British, American, Australian 2-pin plugs. Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates micro-switch which energises transformer To be equipped with BS 2 gang - 3-module plates (p. 48-51) For flush-mounting boxes, use BS 2 gang box depth 48 mm, US type, Italian type boxes depth 48 mm or Cat.No 0 801 55 Power supply: 230 V - 50/60 Hz 3 modules</p> <p>230 V / 120-230 V</p> <p> ○ White ● Magnesium ● Champagne ● Soft Alu ○ White - with earth connector ● Magnesium - with earth connector ● Champagne - with earth connector ● Soft Alu - with earth connector</p>
1	5 726 55	
1	5 726 66	
1	5 726 65	
1	5 721 53	
1	5 726 53	
1	5 727 64	
1	5 727 62	

Pack	Cat.Nos	Chimes
1	5 722 06	<p>230 V - 50 Hz Consumption: 65 mA 1 melody Tone level: 73 dB at 1 m Compatible with push-button Cat.No 0 416 45</p> <p> ○ White ● Magnesium</p>
1	5 722 46	

Hotel equipment

Arteor wiring devices square version



5 737 22



5 720 57



5 737 78



5 725 54



5 737 81

Support frame and plate selection charts [p. 48 to 51](#)

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Lighting control	Pack	Cat.Nos	Hotel bedroom call indicators
		Master switch - 2 modules 2-way double pole 20 AX - 250 V~ for general control: all ON / all OFF			Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Please clean the room 2 x 1 module
10	5 732 84	○ White			Indicator for corridor Indicator lamp and bell push Installed in the corridor, display calls Supplied with LED
10	5 737 84	● Magnesium	5	5 720 57	○ White
10	5 737 89	● Champagne	5	5 725 57	● Magnesium
10	5 737 88	● Soft Alu	5	5 737 78	● Champagne
		Master push-button - 2 modules 2-way 6 A - 250 V~ for general control: all ON/ all OFF			● Soft Alu
10	5 732 86	○ White	5	5 720 54	Internal control unit Allows the user to select the desired setting Supplied with LED
10	5 737 86	● Magnesium	5	5 725 54	○ White
10	5 737 99	● Champagne	5	5 737 82	● Magnesium
10	5 737 98	● Soft Alu	5	5 737 81	● Champagne
		Switch for bed lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~			● Soft Alu
10	5 732 94	○ White			
5	5 737 94	● Magnesium			
5	5 737 63	● Champagne			
5	5 737 62	● Soft Alu			
		Push-button for bed lights - 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~			
10	5 732 96	○ White			
5	5 737 96	● Magnesium			
		Electric roller blinds control - 250 VA			
		Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions)			
10	5 732 22	○ White			
10	5 737 22	● Magnesium			
10	5 737 76	● Champagne			
10	5 737 75	● Soft Alu			
		Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism)			
10	5 732 24	○ White			
10	5 737 24	● Magnesium			
		Curtain control - 250 VA			
		Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions)			
10	5 732 34	○ White			
10	5 737 34	● Magnesium			
		Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism)			
10	5 732 36	○ White			
10	5 737 36	● Magnesium			

Hotel equipment

Arteor wiring devices round version



5 732 95



5 737 35



5 725 67



5 725 74

Support frame and plate selection charts [p. 48 to 51](#)

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 46) and plates (p. 48 to 51)

Pack	Cat.Nos	Lighting control
10 10	5 732 85 5 737 85	Master switch - 2 modules 2-way double pole 20 AX - 250 V~ for general control: all ON / all OFF <ul style="list-style-type: none"> ○ White ● Magnesium
10 10	5 732 87 5 737 87	Master push-button - 2 modules 2-way 6 A - 250 V~ for general control: all ON/ all OFF <ul style="list-style-type: none"> ○ White ● Magnesium
5 5	5 732 95 5 737 95	Switch for bed lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~ <ul style="list-style-type: none"> ○ White ● Magnesium
5 5	5 732 97 5 737 97	Push-button for bed lights - 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~ <ul style="list-style-type: none"> ○ White ● Magnesium

Pack	Cat.Nos	Electric roller blinds control - 250 VA
10 10	5 732 23 5 737 23	Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) <ul style="list-style-type: none"> ○ White ● Magnesium
10 10	5 732 25 5 737 25	Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) <ul style="list-style-type: none"> ○ White ● Magnesium

Pack	Cat.Nos	Curtain control - 250 VA
10 10	5 732 35 5 737 35	Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) <ul style="list-style-type: none"> ○ White ● Magnesium
10 10	5 732 37 5 737 37	Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) <ul style="list-style-type: none"> ○ White ● Magnesium

Pack	Cat.Nos	Hotel bedroom call indicators
		Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Please clean the room 2 x 1 module
5 5 5	5 720 67 5 725 67 5 727 31	Indicator for corridor Indicator lamp and bell push Installed in the corridor, display calls Supplied with LED <ul style="list-style-type: none"> ○ White ● Magnesium ● Soft Alu
5 5 5	5 720 74 5 725 74 5 727 49	Internal control unit Allows the user to select the desired setting Supplied with LED <ul style="list-style-type: none"> ○ White ● Magnesium ● Soft Alu

Pack	Cat.Nos	Buzzers
10 5	5 722 04 5 727 04	230 V - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium
10 10	5 722 07 5 722 47	230 V - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium

Notes



BTicino (Thailand) Ltd.

Bangkok | Office

10th F Ploenchit Center,
2 Sukhumvit Road,
Klongtoey, Bangkok 10110
Tel. +66 (0) 2 656 9162 - 7
Fax. +66 (0) 2 656 9197

Bangkok | Concept Store
12th F Ploenchit Center,

Bangkok | Training Center
12th F Ploenchit Center,



www.bticino.co.th